


Air Cylinder

CS1 Series

ø125, ø140, ø160, ø180, ø200, ø250, ø300

Series Variations

Series	Action	Type	Basic	Standard variations With rod boot	Bore size (mm)	Page
Standard CS1 Series  CS1 Series  CS1W Series	Double acting	Single rod CS1 series	Lube	●	125 140 160 180 200 250 300	620
			Non-lube	●	125 140 160 180 200 250 300	
			Air-hydro	●	125 140 160	
		Double rod CS1W series	Lube	●	125 140 160 180 200 250 300	638
			Non-lube	●	125 140 160 180 200 250 300	
			Air-hydro	●	125 140 160	
Low Friction CS1□Q Series 	Double acting	Single rod CS1□Q series	Non-lube	●	125 140 160	647

For the aluminum tubing of bore sizes 125, 140 and 160, a new “CS2 series”(P.655) model is now available with reduced weight and self weight deflection. Please consider using the CS2 series.

Combinations of Standard Products and Made

CS1 Series

- : Standard
- : Made to Order specifications
- : Special product
- : Not available

● : Standard ○^J : Made to Order specifications ○ : Special product — : Not available		Series	CS1 (Standard)			
			Double acting			
			Single rod			
			Lube	Non-lube	Air-hydro	
Symbol	Specification	Applicable bore size	ø125 to ø300		ø125 to ø160	
Standard	Standard	ø125 to ø300	●	●	●	
CDS1	Built-in magnet	ø125 to ø200	●	●	●	
CS1□-□ ^J _K	With rod boot	ø125 to ø300	●	●	●	
20-	Copper ^{Note 2)} and Fluorine-free	ø125 to ø160	—	●	—	
XA□	Change of rod end shape	ø125 to ø300	○	○	○	
XB5	Oversized rod cylinder	ø125 to ø200	○	○	○	
XB6	Heat-resistant cylinder (−10 to 150°C)		—	○	—	
XB7	Cold-resistant cylinder	ø125 to ø300	○	○	—	
XB16	Large-bore air-hydro cylinder	ø180 to ø200	—	—	○	
XC3	Special port location	ø125 to ø300	○	○	○	
XC4	With heavy duty scraper		○	○	○	
XC5	Heat-resistant cylinder (−10 to 110°C)		○	○ ^{Note 1)}	—	
XC6	Stainless steel		○	○	○	
XC7	Tie-rod, cushion valve, tie-rod nut and similar parts made of stainless steel		○	○	○	
XC8	Adjustable stroke cylinder/Adjustable extension type	ø125 to ø160	○	○	○	
XC9	Adjustable stroke cylinder/Adjustable retraction type		○	○	○	
XC10	Dual stroke cylinder/Double rod type	ø125 to ø300	○	○	○	
XC11	Dual stroke cylinder/Single rod type		○	○	○	
XC12	Tandem cylinder		○	○	○	
XC14	Change of trunnion bracket mounting position		○	○	○	
XC15	Change of tie-rod length		○	○	○	
XC22	Fluororubber seal		○	○ ^{Note 1)}	○	
XC26	Clevis pins with flat washer		○	○	○	
XC27	Double clevis pins made of stainless steel (Stainless steel 304)		○	○	○	
XC30	Rod side trunnion mounted on the rod cover front		○	○	○	
XC35	With coil scraper		○	○	○	
XC39	Special trunnion axis		○	○	○	
XC40	Clevis hole with bushing		○	○	○	
XC50	Knuckle fixed with nuts		○	○	○	
XC68	Hard chrome plated stainless steel rod		○	○	○	
XC86	With rod end bracket		○	○	○	

Note 1) Applicable I.D.: ø125 to ø200, ø250 and ø300 are available upon request for special order.

Note 2) Copper-free for the externally exposed part. For details, refer to the **Web Catalog**.

to Order Specifications

CS1 Series

	CS1 (Standard)			CS1Q (Low friction)
Double acting				
	Double rod			Single rod
	Lube	Non-lube	Air-hydro	Non-lube
	ø125 to ø300		ø125 to ø160	
	●	●	●	●
	●	●	●	●
	●	●	●	●
	—	●	—	—
	⊙	⊙	○	⊙
	○	○	○	○
	—	⊙	—	—
	○	○	—	—
	—	—	○	—
	○	○	○	⊙
	⊙	⊙	○	—
	⊙	⊙	—	—
	⊙	⊙	○	○
	○	○	○	○
	—	—	—	○
	—	—	—	○
	—	—	—	○
	—	—	—	—
	⊙	⊙	○	⊙
	⊙	⊙	○	⊙
	○	○	○	—
	—	—	—	⊙
	—	—	—	⊙
	⊙	⊙	○	⊙
	⊙	⊙	○	—
	○	○	○	○
	—	—	—	○
	○	○	○	○
	○	○	○	○
	○	○	○	○
	○	○	○	○

Air Cylinder: Standard Type Lube/Non-lube Type, Air-hydro Type

CS1 Series

Lube/Non-lube: $\varnothing 125$, $\varnothing 140$, $\varnothing 160$, $\varnothing 180$, $\varnothing 200$, $\varnothing 250$, $\varnothing 300$

Air-hydro: $\varnothing 125$, $\varnothing 140$, $\varnothing 160$

For the aluminum tubing of bore sizes 125, 140 and 160, a new "CS2 series"(P.655) model is now available with reduced weight and self weight deflection. Please consider using the CS2 series.

How to Order

CS1 **L** **160** - **300** - **V**

Mounting

B	Basic type
L	Foot type
F	Rod side flange type
G	Head side flange type
C	Single clevis type
D	Double clevis type
T	Center trunnion type

Tubing material

Symbol	Bore size (mm)	Tubing material	Stroke range (mm)
Nil	125, 140	Aluminum tube	1000 or less
	160		1200 or less
	125, 140	Steel tube	1001 or more
	160		1201 or more
F	125, 140	Steel tube	All stroke ^{Note)}
	160		1000 or less
			1200 or less

* Refer to page 621 for the maximum strokes.

Note) The tubing material of items with a bore size of 180 and 200 corresponding to the Class 2 Pressure Vessel Act is aluminum tubing.

Type

Nil	Lube
N	Non-lube
H	Air-hydro

Class 2 Pressure Vessel

(Subject to or not subject to)

Nil	Applicable
V	Not applicable

* This indicates whether or not the cylinder stroke is applicable to the Class 2 Pressure Vessel Act and whether or not the product is made in Japan.

* "-V" is not put on a product with a stroke not applicable to the Class 2 Pressure Vessel Act. For details, refer to page 622.

Made to Order

(Refer to page 621 for details.)

Suffix for cylinder

Rod boot	J	Nylon tarpaulin
	K	Heat resistant tarpaulin
	N	Without cushion
	R	With cushion in rod side
	H	With cushion in head side
	Nil	With cushion in both sides (Air-hydro type has no cushion.)

* If specifying more than one symbol, indicate them in alphabetically

** Air-hydro type has no cushion. No symbol indicates no cushion.

Cylinder stroke (mm)

(Refer to "Maximum Stroke" on page 621.)

Bore size

Lube, Non-lube	Air-hydro
125	125 mm
140	140 mm
160	160 mm
180	180 mm
200	200 mm
250	250 mm
300	300 mm

Port thread type

Nil	Rc
TN	NPT
TF	G

Mounting Bracket Part No.

Bore size (mm)	125	140	160	180	200	250	300
Foot type*	CS1-L12	CS1-L14	CS1-L16	CS1-L18	CS1-L20	CS1-L25	CS1-L30
Flange type	CS1-F12	CS1-F14	CS1-F16	CS1-F18	CS1-F20	CS1-F25	CS1-F30
Single clevis type	CS1-C12	CS1-C14	CS1-C16	CS1-C18	CS1-C20	CS1-C25	CS1-C30
Double clevis type**	CS1-D12	CS1-D14	CS1-D16	CS1-D18	CS1-D20	CS1-D25	CS1-D30

* Order two foot brackets per cylinder.

** When ordering the double clevis, the clevis pin and the cotter pin (2 pcs.) are attached.


For "How to Order" with auto switch, refer to page 625.

Air Cylinder: Standard Type Lube/Non-lube Type, Air-hydro Type **CS1 Series**

Specifications



Symbol



Made to Order Specifications
[Click here for details](#)

Symbol	Specifications
-XA□	Change of rod end shape
-XB5	Oversized rod cylinder
-XB6	Heat-resistant cylinder (−10 to 150°C)
-XC3	Special port location
-XC4	With heavy duty scraper
-XC5	Heat resistant cylinder (110°C)
-XC6	Made of stainless steel
-XC8	Adjustable stroke cylinder/Adjustable extension type
-XC9	Adjustable stroke cylinder/Adjustable retraction type
-XC10	Dual stroke cylinder/Double rod type
-XC11	Dual stroke cylinder/Single rod type
-XC14	Change of trunnion bracket mounting position
-XC15	Change of tie-rod length
-XC22	Fluororubber seal
-XC26	Clevis pins with flat washer
-XC27	Double clevis pin and double knuckle pin made of stainless steel
-XC30	Rod side trunnion
-XC35	With coil scraper
-XC68	Hard chrome plated stainless steel rod
-XC86	With rod end bracket

Rod Boot Material

Symbol	Material	Maximum ambient temperature
J	Nylon tarpaulin	70°C
K	Heat resistant tarpaulin	110°C *

* Maximum ambient temperature for the rod boot itself.

Type	Lube, Non-lube	Air-hydro
Bore size (mm)	ø125 to ø300	ø125, ø140, ø160
Fluid	Air	Turbine oil
Proof pressure	1.57 MPa ^{Note)}	
Maximum operating pressure	0.97 MPa	
Minimum operating pressure	0.05 MPa	0.06 MPa
Piston speed	50 to 500 mm/s	0.5 to 200 mm/s
Cushion	Air cushion	None
Ambient and fluid temperature	0 to 70°C (No freezing), Air-hydro type: 5 to 60°C	
Stroke length tolerance (mm)	250 or less ^{+1.0} _{−0} , 251 to 1,000 ^{+1.4} _{−0} , 1,001 to 1,500 ^{+1.8} _{−0} 1501 to 2000 ^{+2.2} _{−0} , 2001 to 2400 ^{+2.6} _{−0}	
Mounting	Basic type, Foot type, Rod side flange type, Head side flange type, Single clevis type, Double clevis type, Center trunnion type	

Note) Item corresponding to Class 2 Pressure Vessel Act is 1.46 MPa.

Maximum Stroke

(mm)

Tubing material	Aluminum tube	Steel tube	
Mounting bracket	Basic type, Head side flange type Single clevis type, Double clevis type Center trunnion type, Foot type Rod side flange type	Basic type Head side flange type Single clevis type Double clevis type Center trunnion type	Foot type Rod side flange type
Bore size (mm)			
125	1000 or less	1000 or less	1600 or less
140	1000 or less	1000 or less	1600 or less
160	1200 or less	1200 or less	1600 or less
180	—	1200 or less	2000 or less ^{Note 1)}
200	—	1200 or less ^{Note 1)}	2000 or less ^{Note 1)}
250	—	1200 or less	2400 or less
300	—	1200 or less	2400 or less

Note 1) The tubing material of items with a bore size of 180 and 200 corresponding to the Class 2 Pressure Vessel Act is aluminum tubing.

Note 2) Using a stroke of a length which is smaller than the effective cushion length may result in reduced air cushion performance. Refer to "Technical Data 1" on page 1573 for details on the effective cushion length.

Accessory

Mounting	Basic type	Foot type	Rod side flange type	Head side flange type	Single clevis type	Double clevis type	Center trunnion type
Standard equipment	Clevis pin, Cotter pin	—	—	—	—	●	—
Option	Rod end nut	●	●	●	●	●	●
	Single knuckle joint	●	●	●	●	●	●
	Double knuckle joint (Clevis pin, Cotter pin)	●	●	●	●	●	●
	Rod boot	●	●	●	●	●	●

* In the case of using the rod end nut together with the single knuckle joint or double knuckle joint, refer to page 637.

Principal Parts Material and Surface Treatment

Description		Material	Note
Cover		Rolled steel plate	Black painted
Tube	ø125, ø140, ø160	Aluminum alloy	Hard anodized
		Carbon steel tube	Inside: Hard chrome plated
	ø180, ø200, ø250, ø300	Carbon steel tube ^{Note)}	Inside: Hard chrome plated ^{Note)}
Sliding part seal	Lube	NBR	JIS B 2401 O-ring
	Non-lube	NBR	
	Air-hydro	NBR	
Piston rod		Carbon steel	Hard chrome plated
Piston	Lube	Cast iron	
	Non-lube	Aluminum alloy casted (Iron tube: Cast iron)	Chromated (In the case of aluminum alloy casted)
	Air-hydro	Aluminum alloy casted (Iron tube: Cast iron)	Chromated (In the case of aluminum alloy casted)

Note) For items with a bore size of ø180 and ø200 corresponding to the Class 2 Pressure Vessel Act, the material is "Aluminum alloy" and the note should state "Hard anodized".

Weight/Aluminum Tube: Lube (Non-lube, Air-hydro)

(kg)

Bore size (mm)		125	140	160	180 ^{*2}	200 ^{*2}
Basic weight	Basic type	14.85 (13.73)	17.98 (16.57)	24.77 (23.03)	33.44	41.86
	Foot type	16.48 (15.36)	20.50 (19.09)	27.57 (25.83)	37.64	46.74
	Rod side flange type	17.53 (16.41)	22.98 (21.57)	31.16 (29.42)	43.27	53.77
	Head side flange type	17.53 (16.41)	22.98 (21.57)	31.16 (29.42)	43.27	53.77
	Single clevis type	17.92 (16.80)	22.27 (20.86)	30.26 (28.52)	41.83	51.76
	Double clevis type (Clevis pin, Cotter pin)	18.38 (17.26)	23.02 (21.61)	31.11 (29.37)	43.51	53.79
	Trunnion type	18.98 (17.86)	23.71 (22.30)	32.17 (30.43)	44.06	55.85
	Additional weight per each 100 mm of stroke	1.77	1.96	2.39	3.24	3.87
Accessory bracket	Single knuckle	0.91	1.16	1.56	3.07	2.90
	Double knuckle (Knuckle pin, Cotter pin)	1.37	1.81	2.48	4.74	4.59
	Rod end nut	0.16	0.16	0.23	0.32	0.85

*1 (): Denotes the non-lube and air-hydro type.

*2 The aluminum tubes with a bore size of 180 or 200 are subject to the Class 2 Pressure Vessel Act. (Common to lube and non-lube types)

Calculation example: **CS1L160-500**

- Basic weight.....27.57 (Foot type, ø160)
- Additional weight.....2.39/100 stroke
- Cylinder stroke.....500 stroke

27.57 + 2.39 x 500/100 = 39.52 kg

Weight/Steel Tube

(kg)

Bore size (mm)		125	140	160	180	200	250	300
Standard weight	Basic type	15.20	18.38	25.24	34.16	42.66	79.78	115.94
	Foot type	16.83	20.90	28.04	38.36	47.54	89.28	133.22
	Rod side flange type	17.88	23.38	31.63	43.99	54.57	101.62	146.14
	Head side flange type	17.88	23.38	31.63	43.99	54.57	101.62	146.14
	Single clevis type	18.27	22.67	30.73	42.55	52.56	98.17	149.22
	Double clevis (Clevis pin, Cotter pin)	18.73	23.42	31.58	44.23	54.59	101.36	154.96
	Trunnion type	19.33	24.11	32.64	44.78	56.65	107.62	156.37
	Additional weight per each 100 mm of stroke	2.66	3.01	3.58	4.95	5.75	9.08	12.15
Accessory bracket	Single knuckle	0.91	1.16	1.56	3.07	2.90	5.38	10.82
	Double knuckle (Knuckle pin, Cotter pin)	1.37	1.81	2.48	4.74	4.59	9.22	17.17
	Rod end nut	0.16	0.16	0.23	0.32	0.85	1.26	1.43

Regulations/Class 2 Pressure Vessel Act

The air cylinder uses the compressed air, but may become applicable to the regulations depending on the cylinder size.

So, please fully understand the regulations before using the cylinder.

Regulations regarding Class 2 Pressure Vessel

1. As specified in Articles 42 and 44 of the Industrial Safety and Health Act, the individual examination shall be conducted in conformity with the Class 2 Pressure Vessel Act. If the pressure vessel structure does not satisfy the Class 2 Pressure Vessel Act, it shall not be transferred, leased or installed.

2. About Class 2 Pressure Vessel

The Class 2 Pressure Vessel is a vessel (except for Class 1 Pressure Vessel) that contains the gas with a gauge pressure of 0.2 MPa or more and satisfies the conditions shown below.

- ① Vessel with an inside capacity of 0.04 m³ or more
- ② Vessel with a shell inside diameter of 200 mm or more and a length of 1000 mm or more (extracted from Article 1-7 of the Industrial Safety and Health Act.)

The following shows SMC products that are applicable to the Class 2 Pressure Vessel Act.

Products applicable to the Class 2 Pressure Vessel Act

If the stroke exceeds the level shown below, the cylinder is applicable to the Class 2 Pressure Vessel Act.

Bore size (mm)	Cylinder stroke (mm)
180	1569
200	998
250	813
300	564

3 Periodical Self Inspection

As specified in Article 45 of the Industrial Safety and Health Act, it is obligated to conduct the periodical self inspection of the product applicable to the Class 2 Pressure Vessel Act and keep the inspection records when using it. (Related laws: Articles 88 and 89 of the Ordinance on Safety of Boilers and Pressure Vessels) After the use of the product applicable to the Class 2 Pressure Vessel Act has been started, the self inspection of the following points is conducted once a year and the inspection results are recorded.

- 1 Check the main body for damage.
- 2 Check the lid tightening bolt for wear.
- 3 Check the pipe and valve for damage.

⚠ Precautions

Be sure to read this before handling the products.
Refer to page 20 for safety instructions and pages 21 to 30 for actuator and auto switch precautions.

⚠ Warning

Do not use the cylinder as a shock absorber.

- Using the cylinder as a shock absorber may cause damage.

⚠ Caution

Do not open the cushion valve excessively.

- If the cushion valve is rotated excessively in the opening direction (counterclockwise), it could be damaged. Be aware that the valve could slip out, or the threads becomes too short.

Regarding the installation of a knuckle joint

- Refer to page 637 if a knuckle joint must be installed on the piston rod by using the rod end nut.

Do not place tape or other objects onto the painted surface of the unit.

- The paint of the CS cylinder is dried naturally, so it may peel off if tape or another object is placed onto it.

4 Products not applicable to the Class 2 Pressure Vessel Act

According to Articles 13 and 14 of the Industrial Safety and Health Act, when it is obvious that the product is not used in Japan, it is not necessary to examine the product in conformity with the Class 2 Pressure Vessel Act. Additionally, when it is obvious that the product is not used in Japan, the product is exempted from the machine applicable to Articles 42 and 44 of the Industrial Safety and Health Act.

Please order the air cylinder with “-V” put at the end of the part number.


(The symbol “-V” is not put on a product with a stroke not applicable to the Class 2 Pressure Vessel Act.)

The cylinders manufactured in SMC overseas factories are not examined in conformity with the Class 2 Pressure Vessel Act. When using the cylinder in Japan, be sure to use the cylinder made in Japan that has been examined in conformity with the Class 2 Pressure Vessel Act.



- 5 A safety valve is installed on the upstream side of the piping so that any pressure exceeding the maximum operating pressure of the cylinder applicable to the Class 2 Pressure Vessel Act is not applied.

Construction


Lube

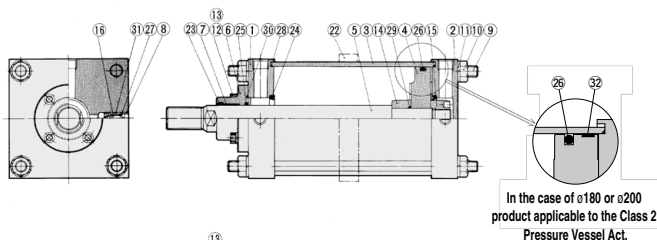

Non-lube

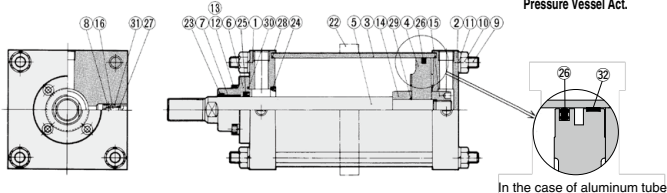

Air-hydro

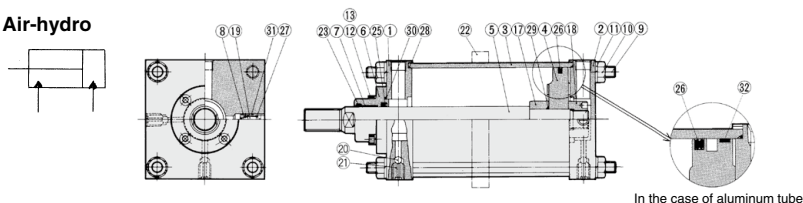

Component Parts

No.	Description	Material	Note
1	Rod cover	Rolled steel plate	Black painted
2	Head cover	Rolled steel plate	Black painted
3	Cylinder tube	Aluminum alloy Carbon steel tube	Hard anodized Inside: Hard chrome plated
4	Piston	Cast iron **	
5	Piston rod	Carbon steel	Hard chrome plated
6	Retaining plate	Cast iron	Black painted
7	Bushing	Bearing alloy	
8	Valve guide	Brass	
9	Tie-rod	Carbon steel	Chromated
10	Tie-rod nut	Rolled steel	Black zinc chromated
11	Spring washer	Steel wire	Black zinc chromated
12	Retaining plate bolt	Chromium molybdenum steel	Black zinc chromated
13	Spring washer	Steel wire	Black zinc chromated
14	Cushion ring A	Rolled steel	Electroless nickel plating
15	Cushion ring B	Rolled steel	Electroless nickel plating
16	Cushion valve	Rolled steel	Electroless nickel plating
17	Spacer A	Rolled steel	Zinc chromated
18	Spacer B	Rolled steel	Zinc chromated
19	Air releasing B	Rolled steel	Zinc chromated
20	Air releasing A	Chromium molybdenum steel	
21	Check ball	Chrome bearing steel	
22	Tie-rod reinforcement ring *	Rolled steel	Black painted
32	Wear ring	Resin	

* In the case of long strokes

** Aluminum tubing material of non-lube and air-hydro type is an aluminum alloy casted.

• Trunnion type should not be disassembled. (Refer to page 654.)

Seal List

No.	Description	Material	Note
Lube			
23	Wiper ring	NBR	
24	Cushion seal		
25	Rod seal		
26	Piston seal		
27	Valve seal		
28	Tube gasket		
29	Piston gasket		
30	Retaining plate gasket		
31	Guide gasket		

Non-lube

Seals except 25 and 26 are the same as for the lube-type.

25	Rod seal	NBR	
26	Piston seal		

Air-hydro

Seals except 25 and 26 are the same as for the lube-type. (Except cushion seal)

No.	Description	Material	Note
25	Rod seal	NBR	
26	Piston seal		

Replacement Parts (Seal kit)

• For replacement parts no. (seal kit) for air cylinder standard type CS1 series, refer to page 624.

** Seal kits does not include cushion seal, piston gasket and guide gasket because those are not replaceable parts.

CS1 Series

Standard/Replacement Parts/Seal Kit

When ordering the replacement parts (seal kits) for standard type CS1 series air cylinders, indicate the order number listed in the table on the right.
Each set of replacement parts contains the following: Wiper ring, rod seal, piston seal, valve seal, tube gasket, and push plate gasket (for 1 cylinder).

Standard (Lube)

Bore size(mm)	Kit no.	Description
125	CS1-125A-PS	Component part numbers: 23, 25, 26, 27, 28, 30
140	CS1-140A-PS	
160	CS1-160A-PS	
180	CS1-180A-PS	
200	CS1-200A-PS	
250	CS1-250A-PS	
300	CS1-300A-PS	

* Seal kit includes a grease pack (ø125 to 160: 40 g, ø180 and 200: 50 g, ø250 and 300: 60 g).
Order with the following part number when only the grease pack is needed.
Grease pack part no.: GR-S-010 (10 g), GR-S-020 (20 g)

Standard (Non-lube)

Bore size(mm)	Kit no.	Description
125	CS1N125A-PS	Component part numbers: 23, 25, 26, 27, 28, 30
140	CS1N140A-PS	
160	CS1N160A-PS	
180	CS1N180A-PS	
200	CS1N200A-PS	
250	CS1N250A-PS	
300	CS1N300A-PS	

* Seal kit includes a grease pack (ø125 to 160: 40 g, ø180 and 200: 50 g, ø250 and 300: 60 g).
Order with the following part number when only the grease pack is needed.
Grease pack part no.: GR-S-010 (10 g), GR-S-020 (20 g)

Air-hydro

Bore size(mm)	Kit no.	Description
125	CS1H125A-PS	Component part numbers: 23, 25, 26, 27, 28, 30
140	CS1H140A-PS	
160	CS1H160A-PS	

Air Cylinder

CDS1 Series

ø125, ø140, ø160, ø180, ø200

How to Order

With auto switch CDS1 **L** **160** **300** **M9BW**

Mounting

B	Basic type
L	Foot type
F	Rod side flange type
G	Head side flange type
C	Single clevis type
D	Double clevis type
T	Center trunnion type

Type

Nil	Lube
N	Non-lube
H	Air-hydro

Bore size

Lube, Non-lube		Air-hydro	
125	125 mm	125	125 mm
140	140 mm	140	140 mm
160	160 mm	160	160 mm
180	180 mm		
200	200 mm		

Port thread type

Nil	Rc
TN	NPT
TF	G

Built-in Magnet Cylinder Model

If a built-in magnet cylinder without auto switch is required, there is no need to enter the symbol for auto switch.

Example) CDS1B125-200

Number of auto switches

Nil	2 pcs.
3	3 pcs.
S	1 pc.
n	"n" pcs.

Auto switch

Nil	Without auto switch
-----	---------------------

* Refer to the table below for the applicable auto switch model.

Suffix for cylinder

Rod boot	J	Nylon tarpaulin
	K	Heat resistant tarpaulin
Cushion	N	Without cushion
	R	With cushion in rod side
	H	With cushion in head side
	Nil	With cushion in both sides
	Nil	(Air-hydro type has no cushion.)

* If specifying more than one symbol, indicate them alphabetically.

** Air-hydro type has no cushion. No symbol indicates no cushion.

Cylinder stroke (mm)

(Refer to Maximum Stroke on page 626.)

Applicable Auto Switches

Refer to pages 1271 to 1365 for further information on auto switches.

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model		Lead wire length (m)					Pre-wired connector	Applicable load			
					DC	AC	Tie-rod mounting	Band mounting	0.5 (Nil)	1 (M)	3 (L)	5 (Z)						
Solid state auto switch	—	Grommet	Yes	3-wire (NPN)	24 V	5 V, 12 V	—	M9N	—	●	●	●	○	○	IC circuit	Relay, PLC		
				3-wire (PNP)				M9P	—	●	●	●	○	○				
		2-wire		M9B				—	●	●	●	○	○	—				
		2-wire		—				G39	—	—	—	—	—	IC circuit				
	Diagnostic indication (2-color indicator)	Terminal conduit		3-wire (NPN)	24 V	5 V, 12 V	—	M9NW	—	●	●	●	○	○	IC circuit			
				3-wire (PNP)				M9PW	—	●	●	●	○	○				
				2-wire				M9BW	—	●	●	●	○	○			—	
				2-wire				—	K39	—	—	—	—	—			—	
	Water resistant (2-color indicator)	Grommet		3-wire (NPN)	24 V	5 V, 12 V	—	M9NA ^{*1}	—	○	○	●	○	○	IC circuit			
				3-wire (PNP)				M9PA ^{*1}	—	○	○	●	○	○				
				2-wire				M9BA ^{*1}	—	○	○	●	○	○			—	
				2-wire				—	12 V	—	—	—	—	—			—	
With diagnostic output (2-color indicator)	Magnetic field resistant (2-color indicator)	4-wire (NPN)	5 V, 12 V	—	F59F	—	●	—	●	○	○	IC circuit						
2-wire (Non-polar)		—	—	P3DWA	—	●	—	●	●	○	—							
Reed auto switch	—	Grommet	Yes	3-wire (NPN equivalent)	24 V	5 V	—	A96	—	●	—	●	—	—	IC circuit	Relay, PLC		
				No				12 V	100 V	A93	—	●	●	●	●		—	—
			Yes					5 V, 12 V	100 V or less	A90	—	●	—	●	—		—	—
				No				100 V, 200 V	A54	—	●	—	●	●	—		—	—
			Yes					200 V or less	A64	—	●	—	—	—	—		—	—
				Terminal conduit				Yes	2-wire	—	—	A33	—	—	—		—	—
		—	—		A34	—	—			—	—	—	—	—	Relay, PLC			
		100 V, 200 V	—		A44	—	—			—	—	—	—	—				
		DIN terminal	—		—	A59W	—			●	—	●	—	—	—			

*1 Water resistant type auto switches can be mounted on the above models, but in such case SMC cannot guarantee water resistance.

* Lead wire length symbols: 0.5 m Nil
1 m M
3 m L
5 m Z

* Solid state auto switches marked with "○" are produced upon receipt of order.


* Since there are other applicable auto switches than listed above, refer to page 653 for details.

* For details about auto switches with pre-wired connector, refer to pages 1340 and 1341.

* D-A9□/M9□/M9□W/M9□A/P3DWA□ auto switches are shipped together (not assembled). (Only auto switch mounting brackets are assembled before shipped.)



Symbol



Made to Order Specifications
[Click here for details](#)

Symbol	Specifications
-XA□	Change of rod end shape
-XB5	Oversized rod cylinder
-XC3	Special port location
-XC4	With heavy duty scraper
-XC6	Made of stainless steel
-XC8	Adjustable stroke cylinder/Adjustable extension type
-XC9	Adjustable stroke cylinder/Adjustable retraction type
-XC10	Dual stroke cylinder/Double rod type
-XC11	Dual stroke cylinder/Single rod type
-XC14	Change of trunnio bracket mounting position
-XC15	Change of tie-rod length
-XC22	Fluororubber seal
-XC26	Clevis pins with flat washer
-XC27	Double clevis pin and double knuckle pin made of stainless steel
-XC30	Rod side trunnion
-XC35	With coil scraper
-XC68	Hard chrome plated stainless steel rod
-XC86	With rod end bracket

Refer to pages 651 to 653 for auto switch specifications.

- Proper auto switch mounting position (detection at stroke end) and mounting height
- Minimum auto switch mounting stroke
- Operating range
- Switch mounting bracket: Part no.

Specifications

Type	Lube, Non-lube		Air-hydro
Fluid	Air		Turbine oil
Bore size (mm)	125, 140, 160	180, 200	125, 140, 160
Proof pressure	1.57 MPa	1.2 MPa	1.57 MPa
Maximum operating pressure	0.97 MPa	0.7 MPa	0.97 MPa
Minimum operating pressure	0.05 MPa		0.06 MPa
Piston speed	50 to 500 mm/s		0.5 to 200 mm/s
Cushion	Air cushion		None
Ambient and fluid temperature	0 to 60°C (No freezing), Air-hydro type: 5 to 60°C		
Stroke length tolerance (mm)	250 or less $^{+0.0}_{-0.0}$, 251 to 1,000 $^{+0.1}_{-0.1}$, 1,001 to 1,500 $^{+0.1}_{-0.1}$		
Mounting	Basic type, Foot type, Rod side flange type, Head side flange type, Single clevis type, Double clevis type, Center trunnion type		

Maximum Stroke

(mm)

Bore size (mm)	Maximum stroke	
	Basic type, Head side flange type, Single clevis type, Double clevis type, Center trunnion type	Foot type, Rod side flange type
125, 140	1000 or less	1400 or less
160	1200 or less	1400 or less
180	1200 or less	1500 or less
200	998 or less	998 or less
Note	ø200: Cylinders of the stroke range of 998 to 1200 are special products.	ø200: Cylinders of the stroke range of 998 to 1500 are special products.

Note) Using a stroke of a length which is smaller than the effective cushion length may result in reduced air cushion performance. Refer to "Technical Data 1" on page 1573 for details on the effective cushion length.

Principal Parts Material and Surface Treatment

Description		Material	Note
Cover		Rolled steel plate	Black painted
Tube	ø125, ø140, ø160 ø180, ø200	Aluminum alloy	Hard anodized
Sliding part seal	Lube type	NBR	JIS B 2401 O-ring *
	Non-lube type	NBR	
	Air-hydro type	NBR	
Piston rod		Carbon steel	Hard chrome plated
Piston		Aluminum alloy casted	Chromated

* Foot type, Rod side flange type: In the case of bore size of ø125 and ø140, the stroke range is 1001 to 1400.

In the case of ø160, piston seals of the stroke range 1200 to 1400 are NLP.

* In the case of bore size ø180 and ø200, piston seals are NLP.

Weight

(kg)

Bore size (mm)		125	140	160	180	200
Basic weight	Basic type	13.79	16.64	23.11	27.55	36.11
	Foot type	15.42	19.16	25.91	31.75	40.99
	Rod side flange type	16.47	21.64	29.50	37.38	48.02
	Head side flange type	16.47	21.64	29.50	37.38	48.02
	Single clevis type	16.86	20.93	28.60	35.94	46.01
	Double clevis (Clevis pin, Cotter pin)	17.32	21.68	29.45	37.62	48.04
	Trunnion type	17.92	22.37	30.51	38.71	50.10
Additional weight per each 100 stroke		1.77	1.96	2.39	2.85	3.42
Accessory bracket	Single knuckle	0.91	1.16	1.56	3.07	2.90
	Double knuckle (Knuckle pin, Cotter pin)	1.37	1.81	2.48	4.74	4.59
	Rod end nut	0.16	0.16	0.23	0.32	0.85

Mounting Bracket Part No.

Bore size (mm)	125	140	160	180	200
Foot type *	CS1-L12	CS1-L14	CS1-L16	CS1-L18	CS1-L20
Flange type	CS1-F12	CS1-F14	CS1-F16	CS1-F18	CS1-F20
Single clevis type	CS1-C12	CS1-C14	CS1-C16	CS1-C18	CS1-C20
Double clevis type **	CS1-D12	CS1-D14	CS1-D16	CS1-D18	CS1-D20

* Order two foot brackets per cylinder.


** When ordering the double clevis, the clevis pin and the cotter pin (2 pcs.) are attached.

Accessory

* For details about the single knuckle joint, double knuckle joint, knuckle pin, clevis pin, and rod end nut, refer to page 637.


Construction

Lube

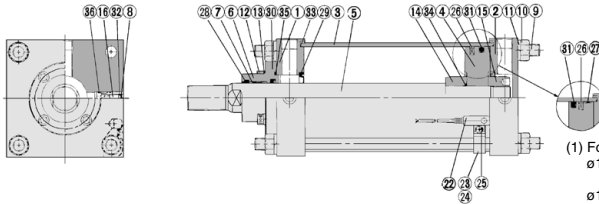


- (1) Foot type: Rod side flange type
 $\phi 125$, $\phi 140$:
 In the case of 1001 to 1400 st
 $\phi 160$:
 In the case of 1201 to 1400 st
 (2) In the case of $\phi 180$, $\phi 200$

Non-lube

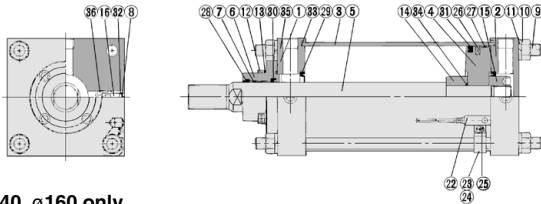

Air-hydro: $\phi 125$, $\phi 140$, $\phi 160$ only

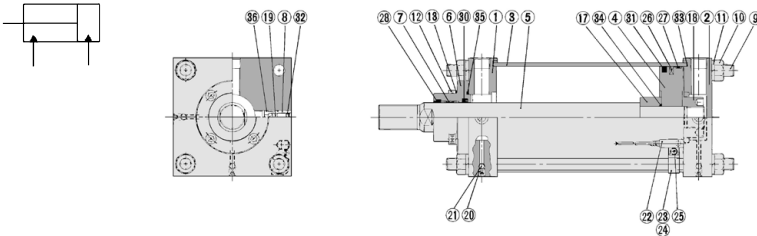

Component Parts

No.	Description	Material	Note
1	Rod cover	Rolled steel plate	Black painted
2	Head cover	Rolled steel plate	Black painted
3	Cylinder tube	Aluminum alloy	Hard anodized
4	Piston	Aluminum alloy casted	Chromated
5	Piston rod	Carbon steel	Hard chrome plated
6	Retaining plate	Cast iron	Black painted
7	Bushing	Bearing alloy	
8	Valve guide	Brass	
9	Tie-rod	Carbon steel	Chromated
10	Tie-rod nut	Rolled steel	Black zinc chromated
11	Spring washer	Steel wire	Black zinc chromated
12	Retaining plate bolt	Chromium molybdenum steel	Black zinc chromated
13	Spring washer	Steel wire	Black zinc chromated
14	Cushion ring A	Rolled steel	Electroless nickel plating
15	Cushion ring B	Rolled steel	Electroless nickel plating
16	Cushion valve	Rolled steel	Electroless nickel plating
17	Spacer A	Rolled steel	Zinc chromated
18	Spacer B	Rolled steel	Zinc chromated
19	Air releasing B	Rolled steel	Zinc chromated
20	Air releasing A	Chromium molybdenum steel	
21	Check ball	Chrome bearing steel	
22	Auto switch	—	
23	Set screw	Chromium molybdenum steel	Zinc chromated
24	Switch mounting bracket	Aluminum alloy	
25	Switch mounting screw	Copper wire	Nickel plated
26	Magnet	—	
27	Wear ring	Resin	

* Trunnion type should not be disassembled. (Refer to page 654.)

Seal List

No.	Description	Material	Note
28	Wiper ring		
29*	Cushion seal		
30	Rod seal		
31	Piston seal	NBR	
32	Valve seal		
33	Tube gasket		
34*	Piston gasket		
35	Retaining plate gasket		
36*	Guide gasket		

Lube (1) (For lube-type 2, refer to page 629.)

Non-lube Seals except ③ and ⑤ are the same as lube type.

30	Rod seal	NBR	
31	Piston seal		

Air-hydro Seals except ③ and ⑤ are the same as lube type.

No.	Description	Material	Note
30	Rod seal		
31	Piston seal	NBR	

Replacement Parts (Seal kit)

- For replacement part no. (seal kits) of cylinder with auto switch CDS1 series, refer to page 629.
- *** Seal kits does not include cushion seal, piston gasket and guide gasket because those are not replaceable parts.

With Auto Switch/Replacement Parts/Seal Kit

When ordering the replacement parts (seal kits) for the CDS1 series cylinder with auto switches, indicate the order number listed in the table on the right.

Each set of replacement parts contains the following: wiper ring, rod seal, piston seal, valve seal, tube gasket, and push plate gasket (for 1 cylinder).

Lube (1)

Bore size (mm)	Kit no.	Description
125	CS1-125A-PS	Component part numbers: 28, 30, 31, 32, 33, 35
140	CS1-140A-PS	
160	CS1-160A-PS	
180	CDS1-180A-PS	
200	CDS1-200A-PS	

* Seal kit includes a grease pack (ø125 to 160: 40 g, ø180 and 200: 50 g). Order with the following part number when only the grease pack is needed.

Grease pack part no.: GR-S-010 (10 g), GR-S-020 (20 g)

Non-lube

Bore size (mm)	Kit no.	Description
125	CS1N125A-PS	Component part numbers: 28, 30, 31, 32, 33, 35
140	CS1N140A-PS	
160	CS1N160A-PS	
180	CS1N180A-PS	
200	CS1N200A-PS	

* Seal kit includes a grease pack (ø125 to 160: 40 g, ø180 and 200: 50 g). Order with the following part number when only the grease pack is needed.

Grease pack part no.: GR-S-010 (10 g), GR-S-020 (20 g)

Lube (2)*

Bore size (mm)	Kit no.	Description
125	CDS1L125A-PS	Component part numbers: 28, 30, 31, 32, 33, 35
140	CDS1L140A-PS	
160	CDS1L160A-PS	

* Foot type, Rod side flange type: ø125, ø140—1001 to 1400 stroke, ø160—1201 to 1400 stroke

* Seal kit includes a grease pack (ø125 to 160: 40 g, ø180 and 200: 50 g). Order with the following part number when only the grease pack is needed.

Grease pack part no.: GR-S-010 (10 g), GR-S-020 (20 g)

Air-hydro


Bore size (mm)	Kit no.	Description
125	CS1H125A-PS	Component part numbers: 28, 30, 31, 32, 33, 35
140	CS1H140A-PS	
160	CS1H160A-PS	

C□S1 Series

Basic Type: CS1B


Lube type (CS1B), Non-lube type (CS1BN), Air-hydro type (CS1BH)

With rod boot

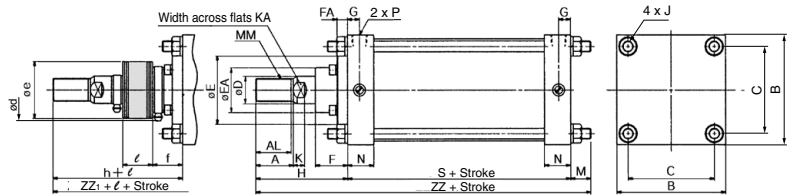

With auto switch: CDS1B

With rod boot

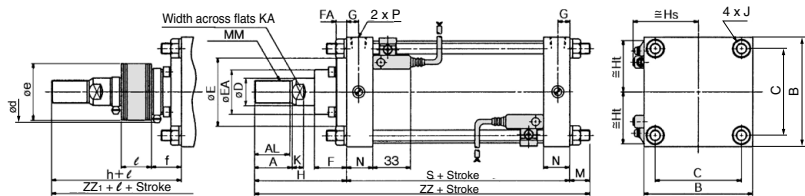

(mm)																				
Type	Bore size (mm)	Stroke range* (mm)	A	AL	B	C	D	E	EA	F	FA	G	J	K	KA	M	MM	N	P	S
Lube Non-lube	125	to 1000	50	47	145	115	36	90	59	43	14	16	M14 x 1.5	15	31	27	M30 x 1.5	35	1/2	98
	140	to 1000	50	47	161	128	36	90	59	43	14	16	M14 x 1.5	15	31	27	M30 x 1.5	35	1/2	98
Air-hydro	160	to 1200	56	53	182	144	40	90	59	43	14	18.5	M16 x 1.5	17	36	30.5	M36 x 1.5	39	3/4	106
	180	to 1200	63	60	204	162	45	115	70	48	17	18.5	M18 x 1.5	20	41	35	M40 x 1.5	39	3/4	111
Lube Non-lube	200	to 1200	63	60	226	182	50	115	74	48	17	18.5	M20 x 1.5	20	46	35	M45 x 1.5	39	3/4	111
	250	to 1200	71	67	277	225	60	140	86	60	20	23	M24 x 1.5	25	56	41.5	M56 x 2	49	1	141
	300	to 1200	80	76	330	270	70	140	96	60	20	23	M30 x 1.5	30	65	51.5	M64 x 2	49	1	146

(mm)											
Type	Bore size (mm)	Without rod boot		With rod boot							
		H	ZZ	d	e	f	h	ℓ	ZZ ₁		
Lube	125	110	235	82	75	40	133	0.2 stroke	258		
Non-lube	140	110	235	82	75	40	133	0.2 stroke	258		
Air-hydro	160	120	256.5	82	75	40	141	0.2 stroke	277.5		
	180	135	281	92	85	45	153	0.2 stroke	299		
Lube	200	135	281	96	90	45	153	0.2 stroke	299		
Non-lube	250	160	342.5	108	105	55	176	0.17 stroke	358.5		
	300	175	372.5	118	115	55	190	0.17 stroke	387.5		

* The minimum stroke with rod boot is 30 mm or more.

With Auto Switch: $\phi 125$ to $\phi 200$ Only (mm)

Type	Bore size (mm)	Stroke range (mm)	S	Without rod boot	With rod boot
				ZZ	ZZ ₁
Lube	125	Up to 1000	98	235	258
Non-lube	140	Up to 1000	98	235	258
Air-hydro	160	Up to 1200	106	256.5	277.5
Lube	180	Up to 1200	115	285	303
Non-lube	200	Up to 998	120	290	308


* Dimensions except mentioned above are the same as standard type.

** For the auto switch mounting position and its mounting height, refer to page 651.


***Refer to "Minimum Stroke for Auto Switch Mounting" on page 652.

Rod Side Flange Type: CS1F


Lube type (CS1F), Non-lube type (CS1FN), Air-hydro type (CS1FH)

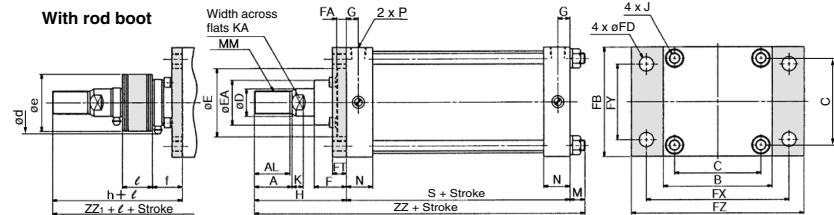

Long stroke

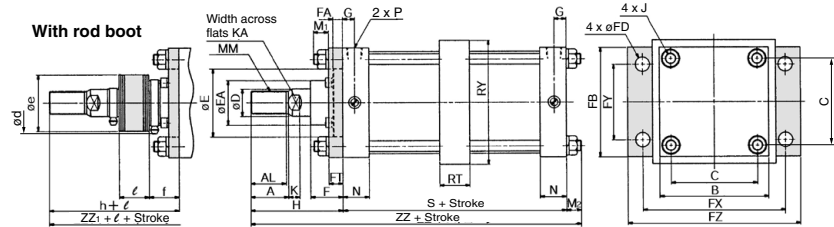

With auto switch: CDS1F

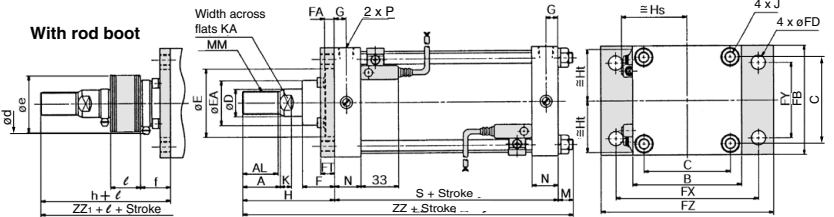

																																				(mm)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
Type	Bore size (mm)	Stroke+ range (mm)	A	AL	B	C	D	E	EA	F	FA	FB	FD	FT	FX	FY	FZ	G	J	K	KA	M	S	N	P	MM	Without rod boot										With rod boot																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
																											H	ZZ	d	e	f	h	l	ZZ1	ZZ2	ZZ3	ZZ4	ZZ5	ZZ6	ZZ7	ZZ8	ZZ9	ZZ10	ZZ11	ZZ12	ZZ13	ZZ14	ZZ15	ZZ16	ZZ17	ZZ18	ZZ19	ZZ20	ZZ21	ZZ22	ZZ23	ZZ24	ZZ25	ZZ26	ZZ27	ZZ28	ZZ29	ZZ30	ZZ31	ZZ32	ZZ33	ZZ34	ZZ35	ZZ36	ZZ37	ZZ38	ZZ39	ZZ40	ZZ41	ZZ42	ZZ43	ZZ44	ZZ45	ZZ46	ZZ47	ZZ48	ZZ49	ZZ50	ZZ51	ZZ52	ZZ53	ZZ54	ZZ55	ZZ56	ZZ57	ZZ58	ZZ59	ZZ60	ZZ61	ZZ62	ZZ63	ZZ64	ZZ65	ZZ66	ZZ67	ZZ68	ZZ69	ZZ70	ZZ71	ZZ72	ZZ73	ZZ74	ZZ75	ZZ76	ZZ77	ZZ78	ZZ79	ZZ80	ZZ81	ZZ82	ZZ83	ZZ84	ZZ85	ZZ86	ZZ87	ZZ88	ZZ89	ZZ90	ZZ91	ZZ92	ZZ93	ZZ94	ZZ95	ZZ96	ZZ97	ZZ98	ZZ99	ZZ100	ZZ101	ZZ102	ZZ103	ZZ104	ZZ105	ZZ106	ZZ107	ZZ108	ZZ109	ZZ110	ZZ111	ZZ112	ZZ113	ZZ114	ZZ115	ZZ116	ZZ117	ZZ118	ZZ119	ZZ120	ZZ121	ZZ122	ZZ123	ZZ124	ZZ125	ZZ126	ZZ127	ZZ128	ZZ129	ZZ130	ZZ131	ZZ132	ZZ133	ZZ134	ZZ135	ZZ136	ZZ137	ZZ138	ZZ139	ZZ140	ZZ141	ZZ142	ZZ143	ZZ144	ZZ145	ZZ146	ZZ147	ZZ148	ZZ149	ZZ150	ZZ151	ZZ152	ZZ153	ZZ154	ZZ155	ZZ156	ZZ157	ZZ158	ZZ159	ZZ160	ZZ161	ZZ162	ZZ163	ZZ164	ZZ165	ZZ166	ZZ167	ZZ168	ZZ169	ZZ170	ZZ171	ZZ172	ZZ173	ZZ174	ZZ175	ZZ176	ZZ177	ZZ178	ZZ179	ZZ180	ZZ181	ZZ182	ZZ183	ZZ184	ZZ185	ZZ186	ZZ187	ZZ188	ZZ189	ZZ190	ZZ191	ZZ192	ZZ193	ZZ194	ZZ195	ZZ196	ZZ197	ZZ198	ZZ199	ZZ200	ZZ201	ZZ202	ZZ203	ZZ204	ZZ205	ZZ206	ZZ207	ZZ208	ZZ209	ZZ210	ZZ211	ZZ212	ZZ213	ZZ214	ZZ215	ZZ216	ZZ217	ZZ218	ZZ219	ZZ220	ZZ221	ZZ222	ZZ223	ZZ224	ZZ225	ZZ226	ZZ227	ZZ228	ZZ229	ZZ230	ZZ231	ZZ232	ZZ233	ZZ234	ZZ235	ZZ236	ZZ237	ZZ238	ZZ239	ZZ240	ZZ241	ZZ242	ZZ243	ZZ244	ZZ245	ZZ246	ZZ247	ZZ248	ZZ249	ZZ250	ZZ251	ZZ252	ZZ253	ZZ254	ZZ255	ZZ256	ZZ257	ZZ258	ZZ259	ZZ260	ZZ261	ZZ262	ZZ263	ZZ264	ZZ265	ZZ266	ZZ267	ZZ268	ZZ269	ZZ270	ZZ271	ZZ272	ZZ273	ZZ274	ZZ275	ZZ276	ZZ277	ZZ278	ZZ279	ZZ280	ZZ281	ZZ282	ZZ283	ZZ284	ZZ285	ZZ286	ZZ287	ZZ288	ZZ289	ZZ290	ZZ291	ZZ292	ZZ293	ZZ294	ZZ295	ZZ296	ZZ297	ZZ298	ZZ299	ZZ300	ZZ301	ZZ302	ZZ303	ZZ304	ZZ305	ZZ306	ZZ307	ZZ308	ZZ309	ZZ310	ZZ311	ZZ312	ZZ313	ZZ314	ZZ315	ZZ316	ZZ317	ZZ318	ZZ319	ZZ320	ZZ321	ZZ322	ZZ323	ZZ324	ZZ325	ZZ326	ZZ327	ZZ328	ZZ329	ZZ330	ZZ331	ZZ332	ZZ333	ZZ334	ZZ335	ZZ336	ZZ337	ZZ338	ZZ339	ZZ340	ZZ341	ZZ342	ZZ343	ZZ344	ZZ345	ZZ346	ZZ347	ZZ348	ZZ349	ZZ350	ZZ351	ZZ352	ZZ353	ZZ354	ZZ355	ZZ356	ZZ357	ZZ358	ZZ359	ZZ360	ZZ361	ZZ362	ZZ363	ZZ364	ZZ365	ZZ366	ZZ367	ZZ368	ZZ369	ZZ370	ZZ371	ZZ372	ZZ373	ZZ374	ZZ375	ZZ376	ZZ377	ZZ378	ZZ379	ZZ380	ZZ381	ZZ382	ZZ383	ZZ384	ZZ385	ZZ386	ZZ387	ZZ388	ZZ389	ZZ390	ZZ391	ZZ392	ZZ393	ZZ394	ZZ395	ZZ396	ZZ397	ZZ398	ZZ399	ZZ400	ZZ401	ZZ402	ZZ403	ZZ404	ZZ405	ZZ406	ZZ407	ZZ408	ZZ409	ZZ410	ZZ411	ZZ412	ZZ413	ZZ414	ZZ415	ZZ416	ZZ417	ZZ418	ZZ419	ZZ420	ZZ421	ZZ422	ZZ423	ZZ424	ZZ425	ZZ426	ZZ427	ZZ428	ZZ429	ZZ430	ZZ431	ZZ432	ZZ433	ZZ434	ZZ435	ZZ436	ZZ437	ZZ438	ZZ439	ZZ440	ZZ441	ZZ442	ZZ443	ZZ444	ZZ445	ZZ446	ZZ447	ZZ448	ZZ449	ZZ450	ZZ451	ZZ452	ZZ453	ZZ454	ZZ455	ZZ456	ZZ457	ZZ458	ZZ459	ZZ460	ZZ461	ZZ462	ZZ463	ZZ464	ZZ465	ZZ466	ZZ467	ZZ468	ZZ469	ZZ470	ZZ471	ZZ472	ZZ473	ZZ474	ZZ475	ZZ476	ZZ477	ZZ478	ZZ479	ZZ480	ZZ481	ZZ482	ZZ483	ZZ484	ZZ485	ZZ486	ZZ487	ZZ488	ZZ489	ZZ490	ZZ491	ZZ492	ZZ493	ZZ494	ZZ495	ZZ496	ZZ497	ZZ498	ZZ499	ZZ500	ZZ501	ZZ502	ZZ503	ZZ504	ZZ505	ZZ506	ZZ507	ZZ508	ZZ509	ZZ510	ZZ511	ZZ512	ZZ513	ZZ514	ZZ515	ZZ516	ZZ517	ZZ518	ZZ519	ZZ520	ZZ521	ZZ522	ZZ523	ZZ524	ZZ525	ZZ526	ZZ527	ZZ528	ZZ529	ZZ530	ZZ531	ZZ532	ZZ533	ZZ534	ZZ535	ZZ536	ZZ537	ZZ538	ZZ539	ZZ540	ZZ541	ZZ542	ZZ543	ZZ544	ZZ545	ZZ546	ZZ547	ZZ548	ZZ549	ZZ550	ZZ551	ZZ552	ZZ553	ZZ554	ZZ555	ZZ556	ZZ557	ZZ558	ZZ559	ZZ560	ZZ561	ZZ562	ZZ563	ZZ564	ZZ565	ZZ566	ZZ567	ZZ568	ZZ569	ZZ570	ZZ571	ZZ572	ZZ573	ZZ574	ZZ575	ZZ576	ZZ577	ZZ578	ZZ579	ZZ580	ZZ581	ZZ582	ZZ583	ZZ584	ZZ585	ZZ586	ZZ587	ZZ588	ZZ589	ZZ590	ZZ591	ZZ592	ZZ593	ZZ594	ZZ595	ZZ596	ZZ597	ZZ598	ZZ599	ZZ600	ZZ601	ZZ602	ZZ603	ZZ604	ZZ605	ZZ606	ZZ607	ZZ608	ZZ609	ZZ610	ZZ611	ZZ612	ZZ613	ZZ614	ZZ615	ZZ616	ZZ617	ZZ618	ZZ619	ZZ620	ZZ621	ZZ622	ZZ623	ZZ624	ZZ625	ZZ626	ZZ627	ZZ628	ZZ629	ZZ630	ZZ631	ZZ632	ZZ633	ZZ634	ZZ635	ZZ636	ZZ637	ZZ638	ZZ639	ZZ640	ZZ641	ZZ642	ZZ643	ZZ644	ZZ645	ZZ646	ZZ647	ZZ648	ZZ649	ZZ650	ZZ651	ZZ652	ZZ653	ZZ654	ZZ655	ZZ656	ZZ657	ZZ658	ZZ659	ZZ660	ZZ661	ZZ662	ZZ663	ZZ664	ZZ665	ZZ666	ZZ667	ZZ668	ZZ669	ZZ670	ZZ671	ZZ672	ZZ673	ZZ674	ZZ675	ZZ676	ZZ677	ZZ678	ZZ679	ZZ680	ZZ681	ZZ682	ZZ683	ZZ684	ZZ685	ZZ686	ZZ687	ZZ688	ZZ689	ZZ690	ZZ691	ZZ692	ZZ693	ZZ694	ZZ695	ZZ696	ZZ697	ZZ698	ZZ699	ZZ700	ZZ701	ZZ702	ZZ703	ZZ704	ZZ705	ZZ706	ZZ707	ZZ708	ZZ709	ZZ710	ZZ711	ZZ712	ZZ713	ZZ714	ZZ715	ZZ716	ZZ717	ZZ718	ZZ719	ZZ720	ZZ721	ZZ722	ZZ723	ZZ724	ZZ725	ZZ726	ZZ727	ZZ728	ZZ729	ZZ730	ZZ731	ZZ732	ZZ733	ZZ734	ZZ735	ZZ736	ZZ737	ZZ738	ZZ739	ZZ740	ZZ741	ZZ742	ZZ743	ZZ744	ZZ745	ZZ746	ZZ747	ZZ748	ZZ749	ZZ750	ZZ751	ZZ752	ZZ753	ZZ754	ZZ755	ZZ756	ZZ757	ZZ758	ZZ759	ZZ760	ZZ761	ZZ762	ZZ763	ZZ764	ZZ765	ZZ766	ZZ767	ZZ768	ZZ769	ZZ770	ZZ771	ZZ772	ZZ773	ZZ774	ZZ775	ZZ776	ZZ777	ZZ778	ZZ779	ZZ780	ZZ781	ZZ782	ZZ783	ZZ784	ZZ785	ZZ786	ZZ787	ZZ788	ZZ789	ZZ790	ZZ791	ZZ792	ZZ793	ZZ794	ZZ795	ZZ796	ZZ797	ZZ798	ZZ799	ZZ800	ZZ801	ZZ802	ZZ803	ZZ804	ZZ805	ZZ806	ZZ807	ZZ808	ZZ809	ZZ810	ZZ811	ZZ812	ZZ813	ZZ814	ZZ815	ZZ816	ZZ817	ZZ818	ZZ819	ZZ820	ZZ821	ZZ822	ZZ823	ZZ824	ZZ825	ZZ826	ZZ827	ZZ828	ZZ829	ZZ830	ZZ831	ZZ832	ZZ833	ZZ834	ZZ835	ZZ836	ZZ837	ZZ838	ZZ839	ZZ840	ZZ841	ZZ842	ZZ843	ZZ844	ZZ845	ZZ846	ZZ847	ZZ848	ZZ849	ZZ850	ZZ851	ZZ852	ZZ853	ZZ854	ZZ855	ZZ856	ZZ857	ZZ858	ZZ859	ZZ860	ZZ861	ZZ862	ZZ863	ZZ864	ZZ865	ZZ866	ZZ867	ZZ868	ZZ869	ZZ870	ZZ871	ZZ872	ZZ873	ZZ874	ZZ875	ZZ876	ZZ877	ZZ878	ZZ879	ZZ880	ZZ881	ZZ882	ZZ883	ZZ884	ZZ885	ZZ886	ZZ887	ZZ888	ZZ889	ZZ890	ZZ891	ZZ892	ZZ893	ZZ894	ZZ895	ZZ896	ZZ897	ZZ898	ZZ899	ZZ900	ZZ901	ZZ902	ZZ903	ZZ904	ZZ905	ZZ906	ZZ907	ZZ908	ZZ909	ZZ910	ZZ911	ZZ912	ZZ913	ZZ914	ZZ915	ZZ916	ZZ917	ZZ918	ZZ919	ZZ920	ZZ921	ZZ922	ZZ923	ZZ924	ZZ925	ZZ926	ZZ927	ZZ928	ZZ929	ZZ930	ZZ931	ZZ932	ZZ933	ZZ934	ZZ935	ZZ936	ZZ937	ZZ938	ZZ939	ZZ940	ZZ941	ZZ942	ZZ943	ZZ944	ZZ945	ZZ946	ZZ947	ZZ948	ZZ949	ZZ950	ZZ951	ZZ952	ZZ953	ZZ954	ZZ955	ZZ956	ZZ957	ZZ958	ZZ959	ZZ960	ZZ961	ZZ962	ZZ963	ZZ964	ZZ965	ZZ966	ZZ967	ZZ968	ZZ969	ZZ970	ZZ971	ZZ972	ZZ973	ZZ974	ZZ975	ZZ976	ZZ977	ZZ978	ZZ979	ZZ980	ZZ981	ZZ982	ZZ983	ZZ984	ZZ985	ZZ986	ZZ987	ZZ988	ZZ989	ZZ990	ZZ991	ZZ992	ZZ993	ZZ994	ZZ995	ZZ996	ZZ997	ZZ998	ZZ999	ZZ1000	ZZ1001	ZZ1002	ZZ1003	ZZ1004	ZZ1005	ZZ1006	ZZ1007	ZZ1008	ZZ1009	ZZ1010	ZZ1011	ZZ1012	ZZ1013	ZZ1014	ZZ1015	ZZ1016	ZZ1017	ZZ1018	ZZ1019	ZZ1020	ZZ1021	ZZ1022	ZZ1023	ZZ1024	ZZ1025	ZZ1026	ZZ1027	ZZ1028	ZZ1029	ZZ1030	ZZ1031	ZZ1032	ZZ1033	ZZ1034	ZZ1035	ZZ1036	ZZ1037	ZZ1038	ZZ1039	ZZ1040	ZZ1041	ZZ1042	ZZ1043	ZZ1044	ZZ1045	ZZ1046	ZZ1047	ZZ1048	ZZ1049	ZZ1050	ZZ1051	ZZ1052	ZZ1053	ZZ1054	ZZ1055	ZZ1056	ZZ1057	ZZ1058	ZZ1059	ZZ1060	ZZ1061	ZZ1062	ZZ1063	ZZ1064	ZZ1065	ZZ1066	ZZ1067	ZZ1068	ZZ1069	ZZ1070	ZZ1071	ZZ1072	ZZ1073	ZZ1074	ZZ1075	ZZ1076	ZZ1077	ZZ1078	ZZ1079	ZZ1080	ZZ1081	ZZ1082	ZZ1083	ZZ1084	ZZ1085	ZZ1086	ZZ1087	ZZ1088	ZZ1089	ZZ1090	ZZ1091	ZZ1092	ZZ1093	ZZ1094	ZZ1095	ZZ1096	ZZ1097	ZZ1098	ZZ1099	ZZ1100	ZZ1101	ZZ1102	ZZ1103	ZZ1104	ZZ1105	ZZ1106	ZZ1107	ZZ1108	ZZ1109	ZZ1110	ZZ1111	ZZ1112	ZZ1113	ZZ1114	ZZ1115	ZZ1116	ZZ1117	ZZ1118	ZZ1119	ZZ1120	ZZ1121	ZZ1122	ZZ1123	ZZ1124	ZZ1125	ZZ1126	ZZ1127	ZZ1128	ZZ1129	ZZ1130	ZZ1131	ZZ1132	ZZ1133	ZZ1134	ZZ1135	ZZ1136	ZZ1137	ZZ1138	ZZ1139	ZZ1140	ZZ1141	ZZ1142	ZZ1143	ZZ1144	ZZ1145	ZZ1146	ZZ1147	ZZ1148	ZZ1149	ZZ1150	ZZ1151	ZZ1152	ZZ1153	ZZ1154	ZZ1155	ZZ1156	ZZ1157	ZZ1158	ZZ1159	ZZ1160	ZZ1161	ZZ1162	ZZ1163	ZZ1164	ZZ1165	ZZ1166	ZZ1167	ZZ1168	ZZ1169	ZZ1170	ZZ1171	ZZ1172	ZZ1173	ZZ1174	ZZ1175	ZZ1176	ZZ1177	ZZ1178	ZZ1179	ZZ1180	ZZ1181	ZZ1182	ZZ1183	ZZ1184	ZZ1185	ZZ1186	ZZ1187	ZZ1188	ZZ1189	ZZ1190	ZZ1191	ZZ1192	ZZ1193	ZZ1194	ZZ1195	ZZ1196	ZZ1197	ZZ1198	ZZ1199	ZZ1200	ZZ1201	ZZ1202	ZZ1203	ZZ1204	ZZ1205	ZZ1206	ZZ1207	ZZ1208	ZZ1209	ZZ1210	ZZ1211	ZZ1212	ZZ1213	ZZ1214	ZZ1215	ZZ1216	ZZ1217	ZZ1218	ZZ1219	ZZ1220	ZZ1221	ZZ1222	ZZ1223	ZZ1224	ZZ1225	ZZ1226	ZZ1227	ZZ1228	ZZ1229	ZZ1230	ZZ1231	ZZ1232	ZZ1233	ZZ1234	ZZ1235	ZZ1236	ZZ1237	ZZ1238	ZZ1239	ZZ1240	ZZ1241	ZZ1242	ZZ1243	ZZ1244	ZZ1245	ZZ1246	ZZ1247	ZZ1248	ZZ1249	ZZ1250	ZZ1251	ZZ1252	ZZ1253	ZZ1254	ZZ1255	ZZ1256	ZZ1257	ZZ1258	ZZ1259	ZZ1260	ZZ1261	ZZ1262	ZZ1263	ZZ1264	ZZ1265	ZZ1266	ZZ1267	ZZ1268	ZZ1269	ZZ1270	ZZ1271	ZZ1272	ZZ1273	ZZ1274	ZZ1275	ZZ1276	ZZ1277	ZZ1278	ZZ1279	ZZ1280	ZZ1281	ZZ1282	ZZ1283	ZZ1284	ZZ1285	ZZ1286	ZZ1287

Long Stroke

Type	Bore size (mm)	Long stroke range (mm)	M ₁	M ₂	RT	RY	Without rod boot	With rod boot
							ZZ	ZZ1
Lube	125	1401 to 1600	22	22	36	164	230	253
Non-lube	140	1401 to 1600	19	19	36	184	227	250
Air-hydro	160	1401 to 1600	22	22	45	204	248	269
	180	1801 to 2000	26	26	45	228	272	290
Lube	200	1801 to 2000	26	26	45	257	272	290
Non-lube	250	2001 to 2400	30	30	55	325	331	347
	300	2001 to 2400	36	36	55	390	357	372

* The minimum stroke with rod boot is 30 mm or more.


With Auto Switch: ø125 to ø200 Only

Type	Bore size (mm)	Stroke range (mm)	S	Without rod boot	With rod boot
				ZZ	ZZ1
Lube	125	Up to 1400	98	238	261
Non-lube	140	Up to 1400	98	232	255
Air-hydro	160	Up to 1400	106	252	273
Lube	180	Up to 1500	115	281	299
Non-lube	200	Up to 998	120	286	304

* Dimensions except mentioned above are the same as standard type.
** For the auto switch mounting position and its mounting height, refer to page 651.
***Refer to "Minimum Stroke for Auto Switch Mounting" on page 652.

Head Side Flange Type: CS1G

Lube type (CS1G), Non-lube type (CS1GN), Air-hydro type (CS1GH)

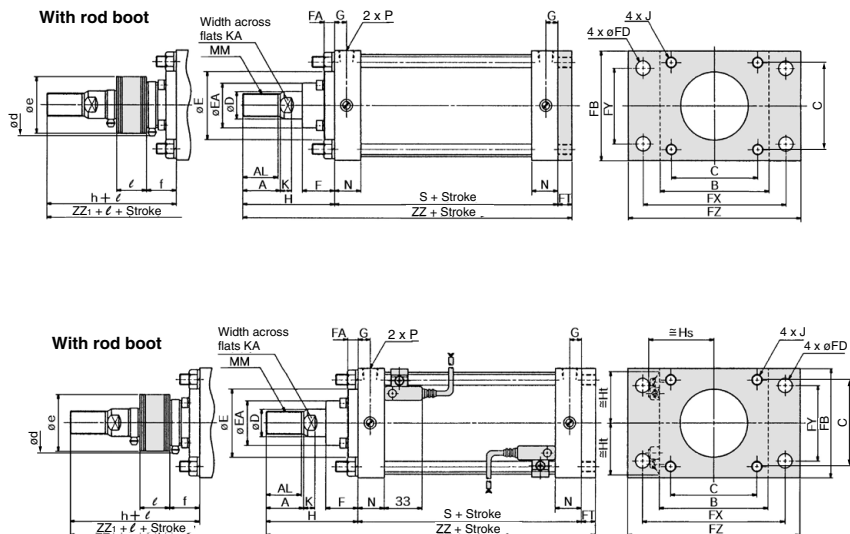

Type	Bore size (mm)	Stroke range (mm)	A	AL	B	C	D	E	EA	F	FA	FB	FD	FT	FX	FY	FZ	G	J	K	KA	MM	N	P
Lube	125	Up to 1000	50	47	145	115	36	90	59	43	14	145	19	14	190	100	230	16	M14 x 1.5	15	31	M30 x 1.5	35	1/2
Non-lube	140	Up to 1000	50	47	161	128	36	90	59	43	14	160	19	20	212	112	255	16	M14 x 1.5	15	31	M30 x 1.5	35	1/2
Air-hydro	160	Up to 1200	56	53	182	144	40	90	59	43	14	180	19	20	236	118	275	18.5	M16 x 1.5	17	36	M36 x 1.5	39	3/4
Lube	180	Up to 1200	63	60	204	162	45	115	70	48	17	200	24	25	265	132	320	18.5	M18 x 1.5	20	41	M40 x 1.5	39	3/4
Non-lube	200	Up to 1200	63	60	226	182	50	115	74	48	17	225	24	25	280	150	335	18.5	M20 x 1.5	20	46	M45 x 1.5	39	3/4
	250	Up to 1200	71	67	277	225	60	140	86	60	20	275	29	30	355	180	420	23	M24 x 1.5	25	56	M56 x 2	49	1
	300	Up to 1200	80	76	330	270	70	140	96	60	20	330	33	30	400	212	475	23	M30 x 1.5	30	65	M64 x 2	49	1

(mm)										
Type	Bore size (mm)	S	Without rod boot		With rod boot					
			H	ZZ	d	e	f	h	ℓ	ZZ ₁
Lube	125	98	110	222	82	75	40	133	0.2 stroke	245
Non-lube	140	98	110	228	82	75	40	133	0.2 stroke	251
Air-hydro	160	106	120	246	82	75	40	141	0.2 stroke	267
	180	111	135	271	92	85	45	153	0.2 stroke	289
Lube	200	111	135	271	96	90	45	153	0.2 stroke	289
Non-lube	250	141	160	331	108	105	55	176	0.17 stroke	347
	300	146	175	351	118	115	55	190	0.17 stroke	366

* The minimum stroke with rod boot is 30 mm or more.

With Auto Switch: ø125 to ø200 Only (mm)

Type	Bore size (mm)	Stroke range (mm)	S	Without rod boot	With rod boot
				ZZ	ZZ ₁
Lube	125	Up to 1000	98	222	245
Non-lube	140	Up to 1000	98	228	251
Air-hydro	160	Up to 1200	106	246	267
Lube	180	Up to 1200	115	275	293
Non-lube	200	Up to 998	120	280	298


* Dimensions except mentioned above are the same as standard type.

** For the auto switch mounting position and its mounting height, refer to page 651.


*** Refer to "Minimum Stroke for Auto Switch Mounting" on page 652.

Single Clevis Type: CS1C

Lube type (CS1C), Non-lube type (CS1CN), Air-hydro type (CS1CH)

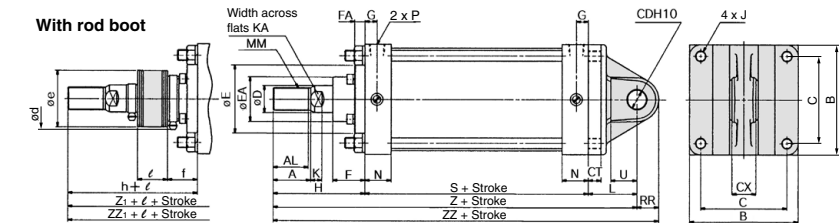

With auto switch: CDS1C

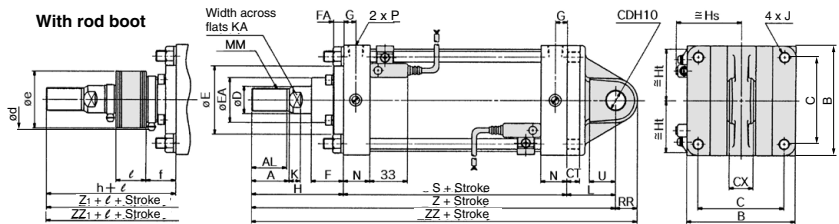

(mm)																			
Type	Bore size (mm)	Stroke range* (mm)	A	AL	B	C	CDH10	CT	CX	D	E	EA	F	FA	G	J	K	KA	L
Lube	125	Up to 1000	50	47	145	115	25 ^{+0.084} ₋₀	17	32 ^{+0.1} _{-0.3}	36	90	59	43	14	16	M14 x 1.5	15	31	65
Non-lube	140	Up to 1000	50	47	161	128	28 ^{+0.084} ₋₀	17	36 ^{+0.1} _{-0.3}	36	90	59	43	14	16	M14 x 1.5	15	31	75
Air-hydro	160	Up to 1200	56	53	182	144	32 ^{+0.100} ₋₀	20	40 ^{+0.1} _{-0.3}	40	90	59	43	14	18.5	M16 x 1.5	17	36	80
	180	Up to 1200	63	60	204	162	40 ^{+0.1} _{-0.3}	23	50 ^{+0.1} _{-0.3}	45	115	70	48	17	18.5	M18 x 1.5	20	41	90
Lube	200	Up to 1200	63	60	226	182	40 ^{+0.100} ₋₀	25	50 ^{+0.1} _{-0.3}	50	115	74	48	17	18.5	M20 x 1.5	20	46	90
Non-lube	250	Up to 1200	71	67	277	225	50 ^{+0.100} ₋₀	30	63 ^{+0.1} _{-0.3}	60	140	86	60	20	23	M24 x 1.5	25	56	110
	300	Up to 1200	80	76	330	270	63 ^{+0.120} ₋₀	37	80 ^{+0.1} _{-0.3}	70	140	96	60	20	23	M30 x 1.5	30	65	130

(mm)														
Type	Bore size (mm)	S	U	Without rod boot			With rod boot							
				H	Z	ZZ	d	e	f	h	l	Z ₁	ZZ ₁	
Lube	125	98	35	110	273	302	82	75	40	133	0.2 stroke	296	325	
Non-lube	140	98	40	110	283	315	82	75	40	133	0.2 stroke	306	338	
Air-hydro	160	106	45	120	306	342	82	75	40	141	0.2 stroke	327	363	
	180	111	50	135	336	380	92	85	45	153	0.2 stroke	354	398	
Lube	200	111	50	135	336	380	96	90	45	153	0.2 stroke	354	398	
Non-lube	250	141	65	160	411	466	108	105	55	176	0.17 stroke	427	482	
	300	146	80	175	451	519	118	115	55	190	0.17 stroke	466	534	

* The minimum stroke with rod boot is 30 mm or more.

With Auto Switch: ø125 to ø200 Only (mm)

Type	Bore size (mm)	Stroke range (mm)	S	Without rod boot / With rod boot			
				Z	ZZ	Z1	ZZ1
Lube	125	Up to 1000	98	273	302	296	325
Non-lube	140	Up to 1000	98	283	315	306	338
Air-hydro	160	Up to 1200	106	306	342	327	363
Lube	180	Up to 1200	115	340	384	358	402
Non-lube	200	Up to 998	120	345	389	363	407

* Dimensions except mentioned above are the same as standard type.


** For the auto switch mounting position and its mounting height, refer to page 651.

*** Refer to "Minimum Stroke for Auto Switch Mounting" on page 652.

Double Clevis Type: CS1D


Lube type (CS1D), Non-lube type (CS1DN), Air-hydro type (CS1DH)

With rod boot

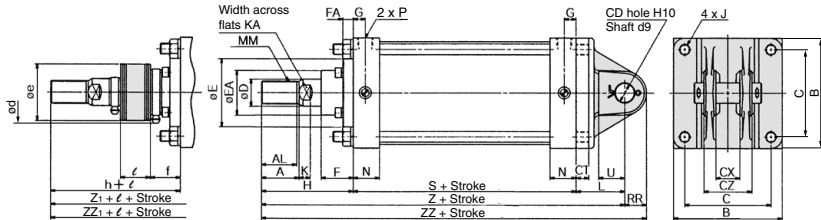

With auto switch: CDS1D

With rod boot

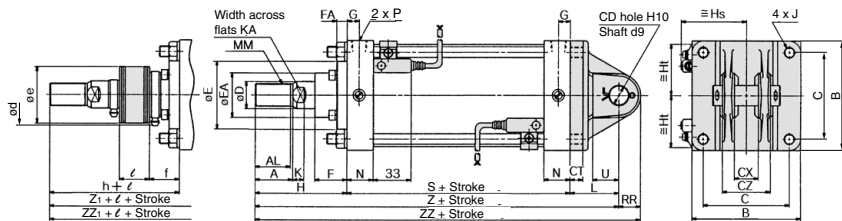

Note) Clevis pin and cotter pin are shipped together.

Type	Bore size (mm)	Stroke range ^a (mm)	A	AL	B	C	CD _{H10}	CT	CX	CZ	D	E	EA	F	FA	G	J	K	KA	L	MM	N	P	RR
Lube	125	Up to 1000	50	47	145	115	25 ^{+0.084} ₀	17	32 ^{+0.3} _{+0.1}	64 ⁰ _{-0.2}	36	90	59	43	14	16	M14 x 1.5	15	31	65	M30 x 1.5	35	1/2	29
Non-lube	140	Up to 1000	50	47	161	128	28 ^{+0.084} ₀	17	36 ^{+0.3} _{+0.1}	72 ⁰ _{-0.2}	36	90	59	43	14	16	M14 x 1.5	15	31	75	M30 x 1.5	35	1/2	32
Air-hydro	160	Up to 1200	56	53	182	144	32 ^{+0.100} ₀	20	40 ^{+0.3} _{+0.1}	80 ⁰ _{-0.2}	40	90	59	43	14	18.5	M16 x 1.5	17	36	80	M36 x 1.5	39	3/4	36
Lube	180	Up to 1200	63	60	204	162	40 ^{+0.100} ₀	23	50 ^{+0.3} _{+0.1}	100 ^{+0.1} _{-0.3}	45	115	70	48	17	18.5	M18 x 1.5	20	41	90	M40 x 1.5	39	3/4	44
Non-lube	200	Up to 1200	63	60	226	182	40 ^{+0.100} ₀	25	50 ^{+0.3} _{+0.1}	100 ^{+0.1} _{-0.3}	50	115	74	48	17	18.5	M20 x 1.5	20	46	90	M45 x 1.5	39	3/4	44
	250	Up to 1200	71	67	277	225	50 ^{+0.100} ₀	30	63 ^{+0.3} _{+0.1}	126 ^{+0.1} _{-0.3}	60	140	86	60	20	23	M24 x 1.5	25	56	110	M56 x 2	49	1	55
	300	Up to 1200	80	76	330	270	63 ^{+0.120} ₀	37	80 ^{+0.3} _{+0.1}	160 ^{+0.1} _{-0.3}	70	140	96	60	20	23	M30 x 1.5	30	65	130	M64 x 2	49	1	68

(mm)													
Type	Bore size (mm)	S	U	Without rod boot				With rod boot					
				H	Z	ZZ	d	e	f	h	ℓ	Z ₁	ZZ ₁
Lube	125	98	35	110	273	302	82	75	40	133	0.2 stroke	296	325
Non-lube	140	98	40	110	283	315	82	75	40	133	0.2 stroke	306	338
Air-hydro	160	106	45	120	306	342	82	75	40	141	0.2 stroke	327	363
	180	111	50	135	336	380	92	85	45	153	0.2 stroke	354	398
Lube	200	111	50	135	336	380	96	90	45	153	0.2 stroke	354	398
Non-Lube	250	141	65	160	411	466	108	105	55	176	0.17 stroke	427	482
	300	146	80	175	451	519	118	115	55	190	0.17 stroke	466	534

* The minimum stroke with rod boot is 30 mm or more.

With Auto Switch: ø125 to ø200 Only (mm)

Type	Bore size (mm)	Stroke range (mm)	S	Without rod boot	With rod boot		
				Z	ZZ	Z ₁	ZZ ₁
Lube	125	Up to 1000	98	273	302	296	325
Non-lube	140	Up to 1000	98	283	315	306	338
Air-hydro	160	Up to 1200	106	306	342	327	363
Lube	180	Up to 1200	115	340	384	358	402
Non-lube	200	Up to 998	120	345	389	363	407

* Dimensions except mentioned above are the same as standard type.


** For the auto switch mounting position and its mounting height, refer to page 651.

*** Refer to "Minimum Stroke for Auto Switch Mounting" on page 652.

Center Trunnion Type: CS1T


Lube type (CS1T), Non-lube type (CS1TN), Air-hydro type (CS1TH)

With rod boot

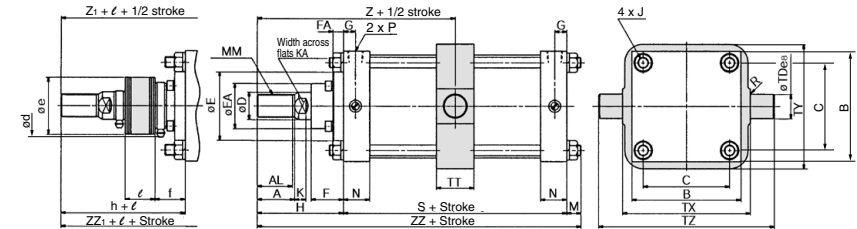

With auto switch: CDS1T

With rod boot

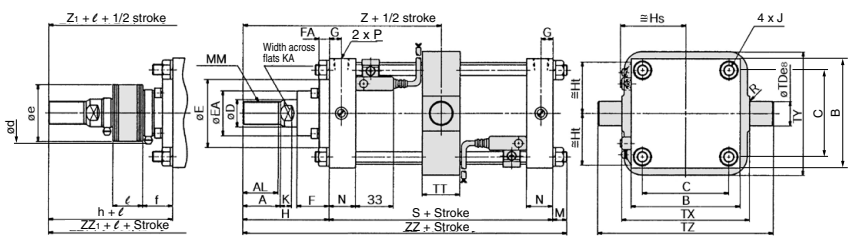

																									(mm)	
Type	Bore size (mm)	Stroke range* (mm)	A	AL	B	C	D	E	EA	F	FA	G	J	K	KA	M	MM	N	P	R	S	TDes	TT	TX		
Lube Non-lube Air-hydro	125	25 to 1000	50	47	145	115	36	90	59	43	14	16	M14 x 1.5	15	31	19	M30 x 1.5	35	1/2	1	98	32	-0.050 -0.089	50	170	
	140	30 to 1000	50	47	161	128	36	90	59	43	14	16	M14 x 1.5	15	31	19	M30 x 1.5	35	1/2	1.5	98	36	-0.050 -0.089	55	190	
	160	35 to 1200	56	53	182	144	40	90	59	43	14	18.5	M16 x 1.5	17	36	22	M36 x 1.5	39	3/4	1.5	106	40	-0.050 -0.089	60	212	
Lube Non-lube	180	30 to 1200	63	60	204	162	45	115	70	48	17	18.5	M18 x 1.5	20	41	26	M40 x 1.5	39	3/4	2	111	45	-0.050 -0.089	59	236	
	200	30 to 1200	63	60	226	182	50	115	74	48	17	18.5	M20 x 1.5	20	46	26	M45 x 1.5	39	3/4	2	111	45	-0.050 -0.089	59	265	
	250	30 to 1200	71	67	277	225	60	140	86	60	20	23	M24 x 1.5	25	56	30	M56 x 2	49	1	3	141	56	-0.060 -0.106	69	335	
	300	35 to 1200	80	76	330	270	70	140	96	60	20	23	M30 x 1.5	30	65	36	M64 x 2	49	1	4	146	67	-0.060 -0.106	79	400	

(mm)													
Type	Bore size (mm)	TY	TZ	Without rod boot				With rod boot					
				H	Z	ZZ	d	e	f	h	ℓ	Z ₁	ZZ ₁
Lube	125	164	234	110	159	227	82	75	40	133	0.2 stroke	182	250
Non-lube	140	184	262	110	159	227	82	75	40	133	0.2 stroke	182	250
Air-hydro	160	204	292	120	173	248	82	75	40	141	0.2 stroke	194	269
	180	228	326	135	190.5	272	92	85	45	153	0.2 stroke	208.5	290
Lube	200	257	355	135	190.5	272	96	90	45	153	0.2 stroke	208.5	290
Non-lube	250	325	447	160	230.5	331	108	105	55	176	0.17 stroke	246.5	347
	300	390	534	175	248	357	118	115	55	190	0.17 stroke	263	372

* The minimum stroke with rod boot is 30 mm or more.
(The minimum stroke with rod boot, but for bore size ø160 and ø300 is 25 mm or more.)


With Auto Switch: ø125 to ø200 Only (mm)

Type	Bore size (mm)	Stroke range (mm)	S	Without rod boot				With rod boot			
				Z	ZZ	Z1	ZZ1	Z	ZZ	Z1	ZZ1
Lube	125	UP to 1000	98	159	227	182	250				
Non-lube	140	UP to 1000	98	159	227	182	250				
Air-hydro	160	UP to 1200	106	173	248	194	269				
	180	UP to 1200	115	192.5	276	210.5	294				
Lube	200	UP to 998	120	195	281	213	299				

* Dimensions except mentioned above are the same as standard type.
** For the auto switch mounting position and its mounting height, refer to page 651.
*** Refer to "Minimum Stroke for Auto Switch Mounting" on page 652.

Accessory Bracket Dimensions


I Type Single Knuckle Joint*



Material: Cast iron

Part no.	Applicable bore size (mm)	A1	A2	E1	L1	MM	NDH10	NX	RR1	U1
I-12	125	8	54	46	100	M30 x 1.5	25 ^{+0.084} ₀	32 ^{+0.1} _{-0.3}	27	33
I-14	140	8	54	48	105	M30 x 1.5	28 ^{+0.084} ₀	36 ^{+0.1} _{-0.3}	30	39
I-16	160	8	60	55	110	M36 x 1.5	32 ^{+0.1} ₀	40 ^{+0.1} _{-0.3}	34	39
I-18	180	8	67	70	125	M40 x 1.5	40 ^{+0.1} ₀	50 ^{+0.1} _{-0.3}	42.5	44
I-20	200	8	67	70	125	M45 x 1.5	40 ^{+0.1} ₀	50 ^{+0.1} _{-0.3}	42.5	44
I-25	250	9	75.5	86	160	M56 x 2	50 ^{+0.1} ₀	63 ^{+0.1} _{-0.3}	53	66
I-30	300	9	84.5	105	175	M64 x 2	63 ^{+0.12} ₀	80 ^{+0.1} _{-0.3}	66	71

Knuckle Pin, Clevis Pin




Material: Carbon steel

Part no.	Applicable bore size (mm)	Dd9	L	ℓ	m	d (drill through)	Applicable cotter pin
IV-12	125	25 ^{+0.065} _{-0.117}	79.5	69.5	5	4	ø4 x 40
IV-14	140	28 ^{+0.065} _{-0.117}	86.5	76.5	5	4	ø4 x 40
IV-16	160	32 ^{+0.080} _{-0.142}	94.5	84.5	5	4	ø4 x 40
IV-18	180, 200	40 ^{+0.080} _{-0.142}	115	105	5	4	ø4 x 55
IV-25	250	50 ^{+0.080} _{-0.142}	144	132	6	5	ø5 x 65
IV-30	300	63 ^{+0.100} _{-0.176}	178	166	6	5	ø5 x 80

* IV-□ includes a pin and 2 cotter pins.

Y Type Double Knuckle Joint*



Material: Cast iron

Part no.	Applicable bore size (mm)	A1	E1	L1	MM	NDH10	NX	NZ	RR1	U1
Y-12	125	8	46	100	M30 x 1.5	25 ^{+0.084} ₀	32 ^{+0.3} _{-0.1}	64 ^{+0.1} _{-0.3}	27	42
Y-14	140	8	48	105	M30 x 1.5	28 ^{+0.084} ₀	36 ^{+0.3} _{-0.1}	72 ^{+0.1} _{-0.3}	30	47
Y-16	160	8	55	110	M36 x 1.5	32 ^{+0.1} ₀	40 ^{+0.3} _{-0.1}	80 ^{+0.1} _{-0.3}	34	46
Y-18	180	8	70	125	M40 x 1.5	40 ^{+0.1} ₀	50 ^{+0.3} _{-0.1}	100 ^{+0.1} _{-0.3}	42.5	54
Y-20	200	8	70	125	M45 x 1.5	40 ^{+0.1} ₀	50 ^{+0.3} _{-0.1}	100 ^{+0.1} _{-0.3}	42.5	54
Y-25	250	9	86	160	M56 x 2	50 ^{+0.1} ₀	63 ^{+0.3} _{-0.1}	126 ^{+0.1} _{-0.3}	53	81
Y-30	300	9	105	175	M64 x 2	63 ^{+0.12} ₀	80 ^{+0.3} _{-0.1}	160 ^{+0.1} _{-0.3}	66	87

* Use a single knuckle joint or a double knuckle joint individually.


(Screw it entirely over the rod end threads and tighten it.)

* Extend the dimensions of A, H, when using a single/double knuckle joint together with a rod end nut.

* Pin and cotter pin are attached for double knuckle joint.

● The rod end bracket type is available as Made to Order "-XC86" when ordering the cylinder and attached mounting brackets. Refer to page 1551.

Rod End Nut



Material: Rolled steel

Part no.	Applicable bore size (mm)	d	H	B	C	D
NT-12	125, 140	M30 x 1.5	18	46	53.1	44
NT-16	160	M36 x 1.5	21	55	63.5	53
NT-18	180	M40 x 1.5	23	60	69.3	57
NT-20	200	M45 x 1.5	27	70	80.8	67
NT-25	250	M56 x 2	34	85	98.1	82
NT-30	300	M64 x 2	38	95	110.0	92

Air Cylinder: Double Rod Type

CS1W Series

Lube/Non-lube: $\varnothing 125$, $\varnothing 140$, $\varnothing 160$, $\varnothing 180$, $\varnothing 200$, $\varnothing 250$, $\varnothing 300$
Air-hydro: $\varnothing 125$, $\varnothing 140$, $\varnothing 160$

For the aluminum tubing of bore sizes 125, 140 and 160, a new "CS2 series"(P.655) model is now available with reduced weight and self weight deflection. Please consider using the CS2 series.

How to Order

CS1W L **125** **100** **V**

With auto switch **CDS1W L** **125** **100** **M9BW**

Built in magnet (ø125 to ø200) (Built-in magnet) **Double rod type**

Mounting

B	Basic type
L	Foot type
F	Rod side flange type
T	Center trunnion type

Tubing material

Symbol	Bore size (mm)	Tubing material	Stroke range (mm)	
			Without switch	With switch
Nil	125, 140	Aluminum tube	1000 or less	1000 or less
	160		1200 or less	1200 or less
	180		1200 or less	1200 or less
	200	Steel tube	1200 or less	998 or less
F	250, 300		1200 or less	—
	125, 140	Steel tube	1000 or less	1000 or less
	160		1200 or less	1200 or less

Port thread type

Nil	Rc
TN	NPT
TF	G

Bore size

Lube, Non-lube		Air-hydro	
125	125 mm	125	125 mm
140	140 mm	140	140 mm
160	160 mm	160	160 mm
180	180 mm		
200	200 mm		
250	250 mm		
300	300 mm		

* It is not available with auto switch.

Type

Nil	Lube
N	Non-lube
H	Air-hydro

Number of auto switches

Nil	2 pcs.
3	3 pcs.
S	1 pc.
n	"n" pcs.

Auto switch

Without auto switch

* Refer to the table below for the applicable auto switch model.

Suffix for cylinder

Rod boot in one side	J	Nylon tarpaulin
Heat resistant tarpaulin	K	
Heat resistant tarpaulin	JJ	
Heat resistant tarpaulin	KK	
Without cushion	N	
With cushion in rod side	R	
With cushion in head side	H	
With cushion in both sides (Air-hydro type has no cushion.)	Nil	

Made to Order (Refer to page 639 for details.)

Class 2 Pressure Vessel (Subject to or not subject to)

Nil	Applicable
V	Not applicable

* This indicates whether or not the cylinder stroke is applicable to the Class 2 Pressure Vessel Act and whether or not the product is made in Japan.
* "V" is not put on a product with a stroke not applicable to the Class 2 Pressure Vessel Act. For details, refer to page 622.

Built-in magnet cylinder model

If a built-in magnet cylinder without auto switch is required, there is no need to enter the symbol for auto switch. (Example) CDS1WB125-100

Cylinder stroke (mm)

(Refer to "Maximum Stroke" on page 639.)

* If specifying more than one symbol, indicate them in alphabetically.
** Air-hydro type has no cushion. No symbol indicates no cushion.

Applicable Auto Switches/Refer to pages 1271 to 1365 for further information on auto switches.

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model		Lead wire length (m)					Pre-wired connector	Applicable load	
					DC	AC	Tie-rod mounting	Band mounting	0.5 (Nil)	1 (M)	3 (L)	5 (Z)				
Solid state auto switch	—	Grommet	Yes	3-wire (NPN)	24 V	5 V, 12 V	M9N	—	●	●	●	○	○	IC circuit	Relay, PLC	
		3-wire (PNP)		12 V		M9P	—	●	●	●	○	○				
	Terminal conduit	2-wire		5 V, 12 V	M9B	—	●	●	●	○	○	IC circuit				
		3-wire (NPN)		12 V	—	G39	—	—	—	—	—					
	Diagnostic indication (2-color indicator)	Grommet	2-wire	5 V, 12 V	—	K39	—	—	—	—	IC circuit					
			3-wire (NPN)	12 V	M9NW	—	●	●	●	○		○				
	Water resistant (2-color indicator)	Grommet	3-wire (PNP)	5 V, 12 V	M9PW	—	●	●	●	○	○	IC circuit				
			2-wire	12 V	M9BW	—	●	●	●	○	○					
	With diagnostic output (2-color indicator)	Grommet	3-wire (NPN)	5 V, 12 V	M9NA ⁺	—	○	○	●	○	○	IC circuit				
			3-wire (PNP)	12 V	M9PA ⁺	—	○	○	●	○	○					
Magnetic field resistant (2-color indicator)	Grommet	2-wire	5 V, 12 V	M9BA ⁺	—	○	○	●	○	○	IC circuit					
		4-wire (NPN)	5 V, 12 V	F59F	—	●	—	●	○	○						
				2-wire (Non-polar)	—	—	P3DWA	—	●	—	●	○	○			
Reed auto switch	—	Grommet	Yes	3-wire (PN equivalent)	—	5 V	A96	—	●	—	●	—	—	IC circuit	—	
			No	12 V	100 V	A93	—	●	●	—	—	IC circuit				
			Yes	5 V, 12 V	100 V or less	A90	—	—	—	—	—					
			No	100 V, 200 V	A54	—	—	—	●	—	—					
		Terminal conduit	Yes	2-wire	24 V	12 V	200 V or less	A64	—	●	—		●	—	—	
							—	—	A33	—	—	—	—	—		
		DIN terminal	Yes	2-wire	24 V	12 V	100 V, 200 V	A34	—	—	—	—	—	PLC		
							—	—	A44	—	—	—	—		—	
		Diagnostic indication (2-color indicator)	Grommet	Yes	2-wire	24 V	12 V	—	A59W	—	●	—	●	—	—	
								—	—	—	—	—	—	—		—

* 1 Water resistant type auto switches can be mounted on the above models, but in such case SMC cannot guarantee water resistance.

* Lead wire length symbols: 0.5 m Nil (Example) M9NW 3 m L (Example) M9NWL
1 m M (Example) M9NWM 5 m Z (Example) M9NWZ


* Solid state auto switches marked with "O" are produced upon receipt of order.

* Since there are other applicable auto switches than listed above, refer to page 653 for details.

* For details about auto switches with pre-wired connector, refer to pages 1340 and 1341.

* D-A9C/M9C/M9CW/M9CA/P3DWA auto switches are shipped together (not assembled). (Only auto switch mounting brackets are assembled before shipped.)

Air Cylinder: Double Rod Type **CS1W Series**




Specifications

Type	Lube, Non-lube	Air-hydro
Fluid	Air	Turbine oil
Proof pressure	1.57 MPa ^{Note)}	
Max. operating pressure	0.97 MPa	0.97 MPa
Min. operating pressure	0.05 MPa	0.06 MPa
Piston speed	50 to 500 mm/s	0.5 to 200 mm/s
Cushion	Air cushion	None
Ambient and fluid temperature	Without switch	0 to 70°C (No freezing)
	With switch	0 to 60°C (No freezing)
Stroke length tolerance	250 st or less: $+1.0_{-0}$ 251 to 1,000 st : $+1.4_{-0}$ 1,001 to 1,200 st : $+1.8_{-0}$	
Mounting	Basic type, Foot type, Rod side flange type, Center trunnion type	

Note) Item corresponding to Class 2 Pressure Vessel Act is 1.46 MPa.

Symbol



Made to Order Specifications
[Click here for details](#)

Symbol	Specifications
-XA□	Change of rod end shape
-XB6	Heat-resistant cylinder (-10 to 150°C)
-XC4	With heavy duty scraper
-XC5	Heat resistant cylinder (110°C)
-XC6	Made of stainless steel
-XC14	Change of trunnion bracket mounting position
-XC15	Change of tie-rod length
-XC30	Rod side trunnion
-XC35	With coil scraper

Refer to pages 651 to 653 for auto switch specifications.

- Proper auto switch mounting position (detection at stroke end) and mounting height
- Minimum auto switch mounting stroke
- Operating range
- Switch mounting bracket: Part no.

Maximum Stroke

(mm)

Tubing material	Aluminum tube		Steel tube
	Without switch	With switch	Without switch
Bore size (mm)	Basic type, Foot type, Rod side flange type, Center trunnion type		
125, 140	1000 or less	1000 or less	1000 or less
160	1200 or less	1200 or less	1200 or less
180	—	1200 or less	1200 or less
200	—	998 or less ^{Note 1)}	1200 or less ^{Note 2)}
250, 300	—	—	1200 or less

Note 1) For models with a bore size of 200 with auto switches, strokes of 999 to 1200 are available as special orders.

Note 2) The tubing material of items with a bore size of 180 and 200 corresponding to the Class 2 Pressure Vessel Act is aluminum tubing.

Note 3) Using a stroke of a length which is smaller than the effective cushion length may result in reduced air cushion performance. Refer to "Technical Data 1" on page 1573 for details on the effective cushion length.

Accessory

Mounting		Basic type	Foot type	Rod side flange type	Center trunnion type
Option	Rod end nut	●	●	●	●
	Single knuckle joint	●	●	●	●
	Double knuckle joint (Clevis pin, Cotter pin)	●	●	●	●
	Rod boot	●	●	●	●

* For details about part numbers and dimensions, refer to page 637.
 (For rod boots, refer to page 643.)

Mounting Bracket Part No.

Bore size (mm)	125	140	160	180	200	250	300
Foot type*	CS1W-L12	CS1W-L14	CS1W-L16	CS1W-L18	CS1W-L20	CS1W-L25	CS1W-L30
Flange type	CS1-F12	CS1-F12	CS1-F16	CS1-F18	CS1-F20	CS1-F25	CS1-F30

* Order two foot brackets per cylinder.

Rod Boot Material

Symbol	Material	Maximum ambient temperature
J	Nylon tarpaulin	70°C
K	Heat resistant tarpaulin	110°C*

* Maximum ambient temperature for the rod boot itself.

Principal Parts Material and Surface Treatment

Description		Material	Note
Cover		Rolled steel plate	Black painted
Tube *	ø125, ø140, ø160	Aluminum alloy	Hard anodized
		Carbon steel tube	Hard chrome plated
	ø180, ø200, ø250, ø300	Carbon steel tube ^{Note)}	Hard chrome plated ^{Note)}
Sliding seal	Lube	NBR	JIS B 2401 O-ring *
	Non-lube	NBR	
	Air-hydro	NBR	
Piston rod		Carbon steel	Hard chrome plated
Piston	Lube	Cast iron (With auto switch: Aluminum alloy casted)	Chromated (In the case of aluminum alloy casted)
	Non-lube	Aluminum alloy casted (Iron tube: Cast iron)	Chromated (In the case of aluminum alloy casted)
	Air-hydro	Aluminum alloy casted (Iron tube: Cast iron)	Chromated (In the case of aluminum alloy casted)

* In the case of an auto switch with bore sizes ø180 and ø200, tubing material is aluminum alloy (hard anodized). Piston seal is NLP.

Note) For items with a bore size of ø180 and ø200 corresponding to the Class 2 Pressure Vessel Act, the material is "Aluminum alloy" and the note should state "Hard anodized".

Weight/Aluminum Tube: Lube Type (Non-lube, Air-hydro) (kg)

Bore size (mm)		ø125	ø140	ø160
Basic weight	Basic type	16.51 (15.28)	19.62 (18.12)	26.65 (24.79)
	Foot type	18.14 (16.91)	22.14 (20.64)	29.45 (27.59)
	Rod side flange type	19.19 (17.96)	24.62 (23.12)	33.04 (31.18)
	Trunnion type	20.64 (19.41)	25.35 (23.85)	34.05 (32.19)
Add'l weight per each 100 mm stroke		2.57	2.76	3.38
Accessory bracket	Single knuckle	0.91	1.16	1.56
	Double knuckle (Knuckle pin, Cotter pin)	1.37	1.81	2.48
	Rod end nut	0.16	0.16	0.23

* (): Denotes the non-lube and air-hydro type.


Calculation: (Example) **CS1WL125-500**
• Basic weight18.14 (Foot type, ø125)
• Additional weight2.57/100 stroke
• Cylinder stroke500 stroke
18.14 + 2.57 x 500/100 = 30.99 kg

Weight/Steel Tube (kg)


Bore size (mm)		ø125	ø140	ø160	ø180	ø200	ø250	ø300
Basic weight	Basic type	16.85	20.03	27.12	36.90	45.79	85.36	122.39
	Foot type	18.48	22.55	29.92	41.10	50.67	94.86	139.67
	Rod side flange type	19.53	25.03	33.51	46.73	57.70	107.20	152.59
	Trunnion type	20.98	25.76	34.52	47.52	59.78	113.20	162.82
Add'l weight per each 100 mm stroke		3.46	3.81	4.57	6.20	7.29	11.30	15.17
Accessory bracket	Single knuckle	0.91	1.16	1.56	3.07	2.90	5.38	10.82
	Double knuckle (Knuckle pin, Cotter pin)	1.37	1.81	2.48	4.74	4.59	9.22	17.17
	Rod end nut	0.16	0.16	0.23	0.32	0.85	1.26	1.43

Construction

Lube, Non-lube With auto switch

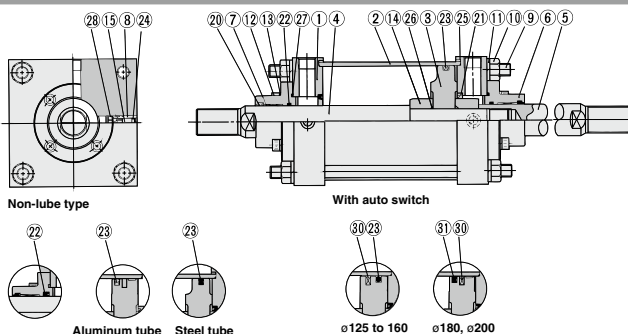

Air-hydro

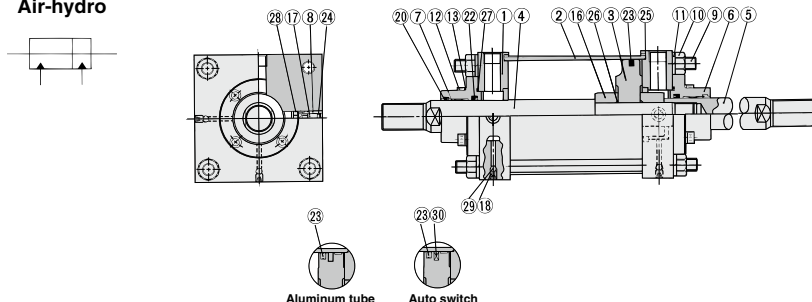

Component Parts

No.	Description	Material	Note
1	Rod cover	Rolled steel	Black painted
2	Cylinder tube	Aluminum alloy ø125 to ø160 Carbon steel tube ø125 to ø300*	Hard anodized Inside: Hard chrome plated
3	Piston	Cast iron*	
4	Piston rod A	Carbon steel	Hard chrome plated
5	Piston rod B	Carbon steel	Hard chrome plated
6	Retaining plate	Cast iron	Black painted
7	Bushing	Bearing alloy	
8	Valve guide	Brass	
9	Tie-rod	Carbon steel	Chromated
10	Tie-rod nut	Rolled steel	Black zinc chromated
11	Spring washer	Steel wire	Black zinc chromated
12	Retaining plate bolt	Chromium molybdenum steel	Black zinc chromated
13	Spring washer	Steel wire	Black zinc chromated
14	Cushion ring A	Rolled steel	Electroless nickel plating
15	Cushion valve	Rolled steel	Electroless nickel plating
16	Spacer A	Rolled steel	
17	Air releasing B	Rolled steel	Zinc chromated
18	Air releasing A	Chromium molybdenum steel	
29	Check ball	Chrome bearing steel	
30	Magnet	—	

* In the case of the aluminum tube of non-lube and air-hydro type, piston material is an aluminum alloy casted. In the case of auto switch bore size ø180 and ø200, piston material is aluminum alloy casted and tubing material is aluminum alloy (hard anodized). For items with a bore size of ø180 and ø200 corresponding to the Class 2 Pressure Vessel Act, the material is "Aluminum alloy" and the note should state "Hard anodized".
 • Trunnion type should not be disassembled. (Refer to page 654.)

Seal List

No.	Description	Material	Note
Lube			
20	Wiper ring	NBR	
21	Cushion seal		
22	Rod seal		
23	Piston seal		
24	Valve seal		
25	Tube gasket		
26	Piston gasket		
27	Retaining plate gasket		
28	Guide gasket		

Non-lube

Seals except 22 and 23 are the same as lube type.

22	Rod seal	NBR	
23	Piston seal	NBR	

Air-hydro

Seals except 22 and 23 are the same as lube type.

No.	Description	Material	Note
22	Rod seal	NBR	
23	Piston seal		

Lube (With switch)

Seals except 31 are the same as lube type.

No.	Description	Material	Note
31	Piston seal	NBR	

Replacement Parts (Seal kit)

- For replacement parts no. (seal kits) of double rod type cylinder for the CS1W series, refer to page 642.
- Seal kits does not include cushion seal, piston gasket and guide gasket because those are not replaceable parts.

CS1W Series

Double Acting, Double Rod/Replacement Parts /Seal kit

When ordering the replacement parts (seal kits) for the CS1W series double rod type cylinder, indicate the order number listed in the table at right.

Each set of replacement parts contains the following: wiper ring, rod seal, piston seal, valve seal, tube gasket, and push plate gasket (for 1 cylinder).

Lube

Bore size (mm)	Kit no.	Description
125	CS1W-125A-PS	Component part numbers: ②①, ②②, ②③, ②④, ②⑤, ②⑦
140	CS1W-140A-PS	
160	CS1W-160A-PS	
180	CS1W-180A-PS	
200	CS1W-200A-PS	
250	CS1W-250A-PS	
300	CS1W-300A-PS	

* Seal kit includes a grease pack (ø125 to 160: 40 g, ø180 and 200: 50 g, ø250 and 300: 60 g). Order with the following part number when only the grease pack is needed.

Grease pack part no.: GR-S-010 (10 g), GR-S-020 (20 g)

Non-lube with Auto Switch

Bore size (mm)	Kit no.	Description
125	CS1WN125A-PS	Component part numbers: ②①, ②②, ②③, ②④, ②⑤, ②⑦
140	CS1WN140A-PS	
160	CS1WN160A-PS	
180	CS1WN180A-PS	
200	CS1WN200A-PS	
250*	CS1WN250A-PS	
300*	CS1WN300A-PS	

* It is not available with auto switch.

* Seal kit includes a grease pack (ø125 to 160: 40 g, ø180 and 200: 50 g, ø250 and 300: 60 g). Order with the following part number when only the grease pack is needed.

Grease pack part no.: GR-S-010 (10 g), GR-S-020 (20 g)

Lube with Auto Switch

Bore size (mm)	Kit no.	Description
125	CS1W-125A-PS	Component part numbers: ②①, ②②, ②③, ②④, ②⑤, ②⑦, ③①
140	CS1W-140A-PS	
160	CS1W-160A-PS	
180	CDS1W180A-PS	
200	CDS1W200A-PS	

* Seal kit includes a grease pack (ø125 to 160: 40 g, ø180 and 200: 50 g). Order with the following part number when only the grease pack is needed.


Grease pack part no.: GR-S-010 (10 g), GR-S-020 (20 g)

Air-hydro


Bore size (mm)	Kit no.	Description
125	CS1WH125A-PS	Component part numbers: ②①, ②②, ②③, ②④, ②⑤, ②⑦
140	CS1WH140A-PS	
160	CS1WH160A-PS	

Basic Type: CS1WB


Lube type (CS1WB), Non-lube type (CS1WBN), Air-hydro type (CS1WBH)

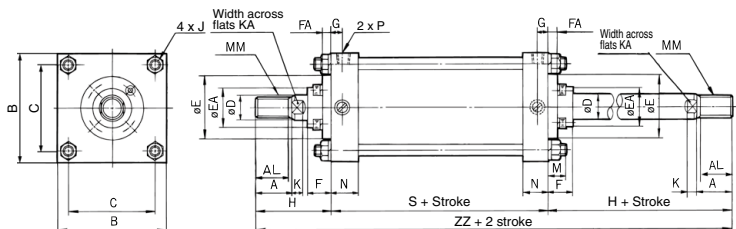

With rod boot (One side)



With rod boot (Both sides)

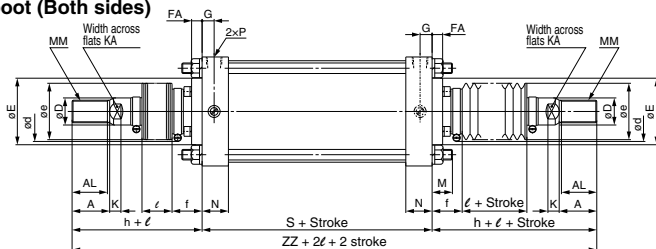

Type	Bore size (mm)	Stroke range (mm)		A	AL	B	C	D	E	EA	F	FA	G	J	K	KA	M	MM	N	P	S
		Without rod boot	With rod boot																		
Lube	125	Up to 1000	30 to 1000	50	47	145	115	36	90	59	43	14	16	M14 x 1.5	15	31	27	M30 x 1.5	35	1/2	98
Non-lube	140	Up to 1000	30 to 1000	50	47	161	128	36	90	59	43	14	16	M14 x 1.5	15	31	27	M30 x 1.5	35	1/2	98
Air-hydro	160	Up to 1200	30 to 1200	56	53	182	144	40	90	59	43	14	18.5	M16 x 1.5	17	36	30.5	M36 x 1.5	39	3/4	106
	180	Up to 1200	30 to 1200	63	60	204	162	45	115	70	48	17	18.5	M18 x 1.5	20	41	35	M40 x 1.5	39	3/4	111
Lube	200	Up to 1200	30 to 1200	63	60	226	182	50	115	74	48	17	18.5	M20 x 1.5	20	46	35	M45 x 1.5	39	3/4	111
Non-lube	250	Up to 1200	30 to 1200	71	67	277	225	60	140	86	60	20	23	M24 x 1.5	25	56	41.5	M56 x 2	49	1	141
	300	Up to 1200	30 to 1200	80	76	330	270	70	140	96	60	20	23	M30 x 1.5	30	65	51.5	M64 x 2	49	1	146

Type	Bore size (mm)	Without rod boot	With rod boot (Single side)							Both sides	
			H	ZZ	d	e	f	h	l	ZZ	ZZ
Lube	125	110	318	82	75	40	133	0.2 stroke	341	364	
Non-lube	140	110	318	82	75	40	133	0.2 stroke	341	364	
Air-hydro	160	120	346	82	75	40	141	0.2 stroke	367	388	
	180	135	381	92	85	45	153	0.2 stroke	399	417	
Lube	200	135	381	96	90	45	153	0.2 stroke	399	417	
Non-lube	250	160	461	108	105	55	176	0.17 stroke	477	493	
	300	175	496	118	115	55	190	0.17 stroke	511	526	

With Auto Switch: ø125 to ø200 Only


Type	Bore size (mm)	Stroke range (mm)		S	Both sides		
		Without rod boot	With rod boot		Without rod boot	With rod boot (Single side)	With rod boot (Both sides)
Lube	125	Up to 1000	30 to 1000	98	318	341	364
Non-lube	140	Up to 1000	30 to 1000	98	318	341	364
Air-hydro	160	Up to 1200	30 to 1200	106	346	367	388
Lube	180	Up to 1200	30 to 1200	115	385	403	421
Non-lube	200	Up to 998	30 to 998	120	390	408	426

*** Refer to "Minimum Stroke for Auto Switch Mounting" on page 652.


CS1W Series

Foot Type: CS1WL

Lube type (CS1WL), Non-lube type (CS1WLN), Air-hydro type (CS1WLH)

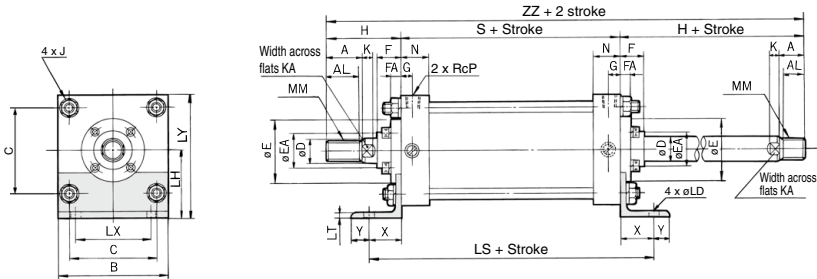

With rod boot



																					(mm)
Type	Bore size (mm)	Stroke range (mm)		A	AL	B	C	D	E	EA	F	FA	G	J	K	KA	LD	LH	LS	LT	
		Without rod boot	With rod boot																		
Lube	125	Up to 1000	30 to 1000	50	47	145	115	36	90	59	43	14	16	M14 x 1.5	15	31	19	85	188	8	
Non-lube	140	Up to 1000	30 to 1000	50	47	161	128	36	90	59	43	14	16	M14 x 1.5	15	31	19	100	188	9	
Air-hydro	160	Up to 1200	30 to 1200	56	53	182	144	40	90	59	43	14	18.5	M16 x 1.5	17	36	19	106	206	9	
	180	Up to 1200	30 to 1200	63	60	204	162	45	115	70	48	17	18.5	M18 x 1.5	20	41	24	125	231	10	
Lube	200	Up to 1200	30 to 1200	63	60	226	182	50	115	74	48	17	18.5	M20 x 1.5	20	46	24	132	231	10	
Non-lube	250	Up to 1200	30 to 1200	71	67	277	225	60	140	86	60	20	23	M24 x 1.5	25	56	29	160	301	12	
	300	Up to 1200	30 to 1200	80	76	330	270	70	140	96	60	20	23	M30 x 1.5	30	65	33	200	326	15	

																			(mm)	
Type	Bore size (mm)	LX	LY	MM	N	P	S	X	Y	Without rod boot		With rod boot (Single side)							Both sides	
										H	ZZ	d	e	f	h	ℓ	ZZ	ZZ		
Lube	125	100	157.5	M30 x 1.5	35	1/2	98	45	20	110	318	82	75	40	133	0.2 stroke	341	364		
Non-lube	140	112	180.5	M30 x 1.5	35	1/2	98	45	30	110	318	82	75	40	133	0.2 stroke	341	364		
Air-hydro	160	118	197	M36 x 1.5	39	3/4	106	50	25	120	346	82	75	40	141	0.2 stroke	367	388		
	180	132	227	M40 x 1.5	39	3/4	111	60	30	135	381	92	85	45	153	0.2 stroke	399	417		
Lube	200	150	245	M45 x 1.5	39	3/4	111	60	30	135	381	96	90	45	153	0.2 stroke	399	417		
Non-lube	250	180	298.5	M56 x 2	49	1	141	80	40	160	461	108	105	55	176	0.17 stroke	477	493		
	300	212	365	M64 x 2	49	1	146	90	40	175	496	118	115	55	190	0.17 stroke	511	526		


With Auto Switch: ø125 to ø200 Only

Type	Bore size (mm)	Stroke range (mm)		S	LS				(mm)
		Without rod boot	With rod boot			Without rod boot	With rod boot (Single side)	With rod boot (Both sides)	
						ZZ	ZZ	ZZ	
Lube	125	Up to 1000	30 to 1000	98	188	318	341	364	
Non-lube	140	Up to 1000	30 to 1000	98	188	318	341	364	
Air-hydro	160	Up to 1200	30 to 1200	106	206	346	367	388	
Lube	180	Up to 1200	30 to 1200	115	235	385	403	421	
Non-lube	200	Up to 998	30 to 998	120	240	390	408	426	


*** Refer to "Minimum Stroke for Auto Switch Mounting" on page 652.

Rod Side Flange Type: CS1WF

Lube type (CS1WF), Non-lube type (CS1WFN), Air-hydro type (CS1WFH)

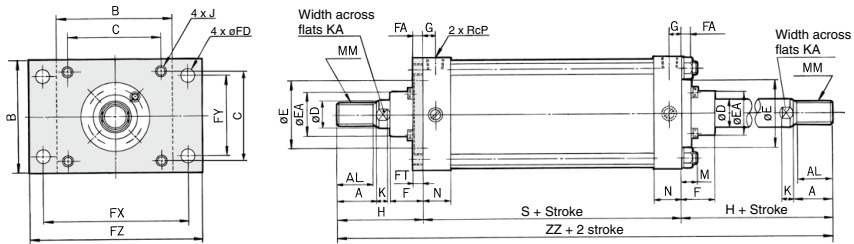

With rod boot

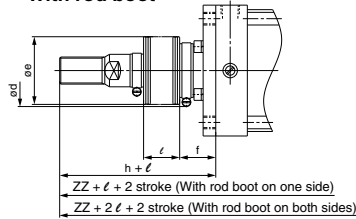

Type	Bore size (mm)	Stroke range (mm)		A	AL	B	B	C	D	E	EA	F	FA	FD	FT	FX	FY	FZ	G	J
		Without rod boot	With rod boot																	
Lube Non-lube Air-hydro	125	Up to 1000	30 to 1000	50	47	145	145	115	36	90	59	43	14	19	14	190	100	230	16	M14 x 1.5
	140	Up to 1000	30 to 1000	50	47	160	161	128	36	90	59	43	14	19	20	212	112	255	16	M14 x 1.5
	160	Up to 1200	30 to 1200	56	53	180	182	144	40	90	59	43	14	19	20	236	118	275	18.5	M16 x 1.5
Lube Non-lube	180	Up to 1200	30 to 1200	63	60	200	204	162	45	115	70	48	17	24	25	265	132	320	18.5	M18 x 1.5
	200	Up to 1200	30 to 1200	63	60	225	226	182	50	115	74	48	17	24	25	280	150	335	18.5	M20 x 1.5
	250	Up to 1200	30 to 1200	71	67	275	277	225	60	140	86	60	20	29	30	355	180	420	23	M24 x 1.5
	300	Up to 1200	30 to 1200	80	76	330	330	270	70	140	96	60	20	33	30	400	212	475	23	M30 x 1.5

(mm)

Type	Bore size (mm)	K	KA	M	MM	N	P	S	Without rod boot		With rod boot (Single side)								Both sides)	
									H	ZZ	d	e	f	h	ℓ	stroke	ZZ	ZZ		
Lube	125	15	31	30	M30 x 1.5	35	1/2	98	110	318	82	75	40	133	0.2	stroke	341	364		
Non-lube	140	15	31	24	M30 x 1.5	35	1/2	98	110	318	82	75	40	133	0.2	stroke	341	364		
Air-hydro	160	17	36	26	M36 x 1.5	39	3/4	106	120	346	82	75	40	141	0.2	stroke	367	388		
	180	20	41	31	M40 x 1.5	39	3/4	111	135	381	92	85	45	153	0.2	stroke	399	417		
Lube	200	20	46	31	M45 x 1.5	39	3/4	111	135	381	96	90	45	153	0.2	stroke	399	417		
Non-lube	250	25	56	35	M56 x 2	49	1	141	160	461	108	105	55	176	0.17	stroke	477	493		
	300	30	65	48	M64 x 2	49	1	146	175	496	118	115	55	190	0.17	stroke	511	526		

With Auto Switch: ø125 to ø200 Only

(mm)

Type	Bore size (mm)	Stroke range (mm)		S	Without rod boot		
		Without rod boot	With rod boot		ZZ	ZZ	ZZ
Lube Non-lube Air-hydro	125	Up to 1000	30 to 1000	98	318	341	364
	140	Up to 1000	30 to 1000	98	318	341	364
	160	Up to 1200	30 to 1200	106	346	367	388
Lube Non-lube	180	Up to 1200	30 to 1200	115	385	403	421
	200	Up to 998	30 to 998	120	390	408	426

*** Refer to "Minimum Stroke for Auto Switch Mounting" on page 652.

Air Cylinder: Low Friction Type Non-lube Type

CS1□Q Series

ø125, ø140, ø160

For the aluminum tubing of bore sizes 125, 140 and 160, a new "CS2 series"(P.655) model is now available with reduced weight and self weight deflection. Please consider using the CS2 series.

How to Order

CS1 L Q 160 - 300 -

With auto switch **CDS1 L Q 160 - 300 - M9BW -**

Mounting

B	Basic type
L	Foot type
F	Rod side flange type
G	Head side flange type
C	Single clevis type
D	Double clevis type
T	Center trunnion type

Low friction type

Cylinder tube bore size

125	125 mm
140	140 mm
160	160 mm

Port thread type

Nil	Rc
TN	NPT
TF	G

Cylinder stroke (mm)

Number of auto switches

Nil	2 pcs.
S	1 pc.
3	3 pcs.
n	"n" pcs.

Auto switch

Nil	Without auto switch
-----	---------------------

* Refer to the table below for the applicable auto switch model.

Suffix for cylinder

Rod boot	J	Nylon tarpaulin
	K	Heat resistant tarpaulin
	A	With cushion in both sides
	R	With cushion in rod side
	H	With cushion in head side
Cushion	Nil	Without cushion

Built-in magnet cylinder model

If a built-in magnet cylinder without auto switch is required, there is no need to enter the symbol for auto switch.
(Example) CDS1LQ125-200

Made to Order
(Refer to page 648 for details.)

Refer to "Standard Stroke" on page 648.

* If specifying more than one symbol, indicate them alphabetically.

Applicable Auto Switches

Refer to pages 1271 to 1365 for further information on auto switches.

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model		Lead wire length (m)				Pre-wired connector	Applicable load
					DC	AC	Tie-rod mounting	Band mounting	0.5 (Nil)	1 (M)	3 (L)	5 (Z)		
Solid state auto switch		Grommet	No	3-wire (NPN)	24 V	5 V, 12 V	M9N	—	●	●	●	○	—	IC circuit
				3-wire (PNP)	—	—	M9P	—	●	●	●	○	—	
		Terminal conduit	No	2-wire	—	12 V	M9B	—	●	●	●	○	—	
				—	—	—	G39	—	—	—	—	—	—	
	Diagnostic indication (2-color indicator)	Grommet	Yes	3-wire (NPN)	24 V	5 V, 12 V	M9NW	—	●	●	●	○	—	IC circuit
				3-wire (PNP)	—	—	M9PW	—	●	●	●	○	—	
		Terminal conduit	Yes	2-wire	—	12 V	M9BW	—	●	●	●	○	—	
				—	—	—	K39	—	—	—	—	—	—	
	Water resistant (2-color indicator)	Grommet	Yes	3-wire (NPN)	24 V	5 V, 12 V	M9NA ^{*1}	—	○	○	●	○	—	IC circuit
				3-wire (PNP)	—	—	M9PA ^{*1}	—	○	○	●	○	—	
		Terminal conduit	Yes	2-wire	—	12 V	M9BA ^{*1}	—	○	○	●	○	—	
				4-wire (NPN)	—	5 V, 12 V	F59F	—	●	—	○	○	—	
Reed auto switch		Grommet	Yes	2-wire (Non-polar)	—	—	P3DWA	—	●	—	●	—	—	IC circuit
				3-wire (NPN equivalent)	—	—	A96	—	●	—	—	—	—	
		Terminal conduit	No	—	—	—	A93	—	●	●	●	—	—	
				—	—	—	A90	—	●	—	—	—	—	
	Diagnostic indication (2-color indicator)	Grommet	Yes	2-wire	24 V	12 V	A54	—	●	—	●	—	—	Relay, PLC
				—	—	—	A64	—	●	—	●	—	—	
		Terminal conduit	No	—	—	—	A33	—	—	—	—	—	—	
				—	—	—	A34	—	—	—	—	—	—	
		DIN terminal	Yes	—	—	—	A44	—	—	—	—	—	—	Relay, PLC
				—	—	—	A59W	—	●	—	●	—	—	

*1 Water resistant type auto switches can be mounted on the above models, but in such case SMC cannot guarantee water resistance.

* Lead wire length symbols: 0.5 m Nil (Example) M9NW
1 m M (Example) M9NWM
3 m L (Example) M9NWL
5 m Z (Example) M9NWZ

* Solid state auto switches marked with "○" are produced upon receipt of order.

* Since there are other applicable auto switches than listed above, refer to page 653 for details.

* For details about auto switches with pre-wired connector, refer to pages 1340 and 1341.



* D-A9□/M9□/M9□W/M9□A/P3DWA□ auto switches are shipped together (not assembled). (Only auto switch mounting brackets are assembled before shipped.)

CS1□Q Series

Designed with a low sliding resistance of the piston, this air cylinder is ideal for applications such as contact pressure control, which requires smooth movements at low pressures.

Low sliding resistance
Min. operating pressure –0.005 MPa

Auto switch mounting is possible.




Made to Order Specifications
[Click here for details](#)

Symbol	Specifications
-XA□	Change of rod end shape
-XC3	Special port location
-XC14	Change of trunnion bracket mounting position
-XC15	Change of tie-rod length
-XC26	Clevis pins with flat washer
-XC27	Double clevis pins made of stainless steel (Stainless steel 304)
-XC30	Rod side trunnion

Application Example

Low friction cylinder is used in combination with precision regulator (IR series).

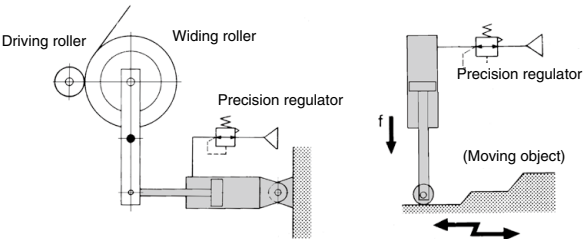

Specifications

Action	Double acting, Single rod
Direction of low friction	Both directions
Fluid	Air
Proof pressure	1.05 MPa
Maximum operating pressure	0.7 MPa
Minimum operating pressure	0.005 MPa *
Ambient and fluid temperature	Without auto switch: 0 to 70°C (No freezing) With auto switch: 0 to 60°C (No freezing)
Allowable leakage	0.5L/min (ANR) or less
Cushion	None (With air cushion is available.)
Lubrication	Not required (Non-lube)
Bore size (mm)	125, 140, 160
Mounting	Basic type, Foot type, Rod side flange type, Head side flange type, Single clevis type, Double clevis type, Center trunnion type

* In the case of w/ cushion, pressure inside cushion stroke is not included.

Maximum Stroke

(mm)			
Tubing material	Aluminum tube (with auto switch)	Iron tube (without auto switch)	
Mounting bracket	Basic type, Head side flange type Single clevis type, Double clevis type Center trunnion type Rod side flange type	Basic type, Head side flange type Single clevis type Double clevis type Center trunnion type	Foot type Rod side flange type
Bore size (mm)			
125	1000 or less	1000 or less	1600 or less
140	1000 or less	1000 or less	1600 or less
160	1200 or less	1200 or less	1600 or less

Refer to pages 651 to 653 for auto switch specifications.

- Proper auto switch mounting position (detection at stroke end) and mounting height
- Minimum auto switch mounting stroke
- Operating range
- Switch mounting bracket: Part no.

Mounting Bracket Part No.

Bore size (mm)	125	140	160
Foot type *	CS1-L12	CS1-L14	CS1-L16
Flange type	CS1-F12	CS1-F14	CS1-F16
Single clevis type	CS1-C12	CS1-C14	CS1-C16
Double clevis type	CS1-D12	CS1-D14	CS1-D16

* Order two foot brackets per cylinder.

Rod Boot Material

Symbol	Material	Max. ambient temperature
J	Nylon tarpaulin	70°C
K	Heat resistant tarpaulin	110°C *

* Maximum ambient temperature for the rod boot itself.

Accessory

Mounting type	Basic type	Foot type	Rod side flange type	Head side flange type	Single clevis type	Double clevis type	Center trunnion type
Standard equipment	Clevis pin	—	—	—	—	●	—
Option	Rod end nut	●	●	●	●	●	●
	Single knuckle joint	●	●	●	●	●	●
	Double knuckle joint (Knuckle pin, Cotter pin)	●	●	●	●	●	●
	Rod boot	●	●	●	●	●	●

Principal Parts Material and Surface Treatment

Description	Material	Note
Cover	Rolled steel plate	Black painted
Tube	Aluminum alloy (with auto switch)	Hard anodized
	Carbon steel tube (without auto switch)	Inside: Hard chrome plated
Sliding part seal	NBR	
Piston rod	Carbon steel	Hard chrome plated
Piston	Aluminum alloy casted	Chromated


Weight/Steel Tube (For aluminum tube [with auto switch], refer to page 627.) (kg)

Bore size (mm)		125	140	160
Basic weight	Basic type	15.20	18.38	25.24
	Foot type	16.83	20.90	28.04
	Rod side flange type	17.88	23.38	31.63
	Head side flange type	17.88	23.38	31.63
	Single clevis type	18.27	22.67	30.73
	Double clevis type	18.73	23.42	31.58
	Trunnion type	19.33	24.11	32.64
Additional weight per each 100 mm of stroke		2.66	3.01	3.58
Accessory bracket	Single knuckle	0.91	1.16	1.56
	Double knuckle (With pin)	1.37	1.81	2.48

Calculation: (Example) **CS1LQ160, 500**

- Basic weight..... 28.04 (Foot type, ø160)
- Additional weight..... 3.58/100 stroke
- Cylinder stroke..... 500 stroke, 28.04 + 3.58 x 500/100 = 45.94 kg


Sliding Resistance

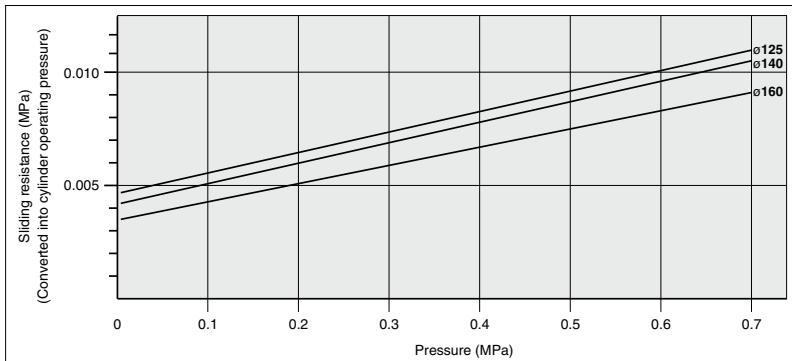

CS1□Q Series

Construction

Non-lube

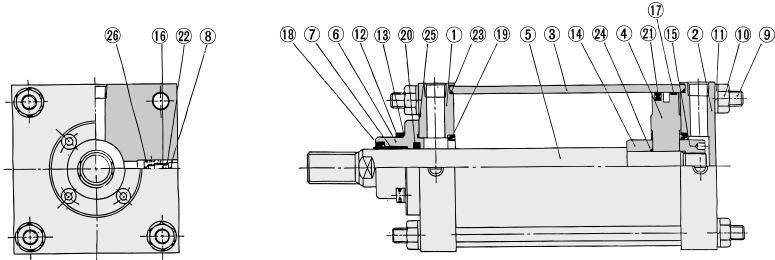

Component Parts

No.	Description	Material	Note
1	Rod cover	Rolled steel plate	Black painted
2	Head cover	Rolled steel plate	Black painted
3	Cylinder tube	Aluminum alloy *	Hard anodized
4	Piston	Carbon steel tube	Hard chrome plated
5	Piston rod	Aluminum alloy casted	Chromated
6	Retaining plate	Carbon steel	Hard chrome plated
7	Bushing	Cast iron	Black painted
8	Valve guide	Bearing alloy	
9	Tie-rod	Brass	
10	Tie-rod nut	Carbon steel	Chromated
11	Spring washer	Carbon steel	Black zinc chromated
12	Retaining plate bolt	Steel wire	Black zinc chromated
13	Spring washer	Chromium molybdenum steel	Black zinc chromated
14	Cushion ring A	Steel wire	Black zinc chromated
15	Cushion ring B	Rolled steel	Electroless nickel plating
16	Cushion valve	Rolled steel	Electroless nickel plating
17	Wear ring	Rolled steel	Electroless nickel plating
18	Wiper ring	Resin	

* With auto switch

Seal List

No.	Description	Material	Note
18	Wiper ring	NBR	
19	Cushion seal *		
20	Rod seal		
21	Piston seal		
22	Valve seal		
23	Tube gasket		
24	Piston gasket		
25	Retaining plate gasket		
26	Guide gasket		

* It is used only in the case of w/ cushion type.

Low Friction Type

Bore size (mm)	Kit no.	Description
125	CS1Q125A-PS	Component part numbers: 18, 20, 21, 22, 23, 25
140	CS1Q140A-PS	
160	CS1Q160A-PS	

* Since the seal kit does not include a grease pack, order it separately.
Grease pack part no.: GR-L-005(5g), GR-L-010(10g), GR-L-150(150g)


** Seal kits does not include cushion seal, piston gasket and guide gasket because those are not replaceable parts.

*** Trunnion type should not be disassembled. (Refer to page 654.)

Dimensions: According to Mounting Brackets

External dimensions for each mounting bracket other than basic type are the same as standard type. Refer to pages 630 to 636.

Basic Type: CS1BQ

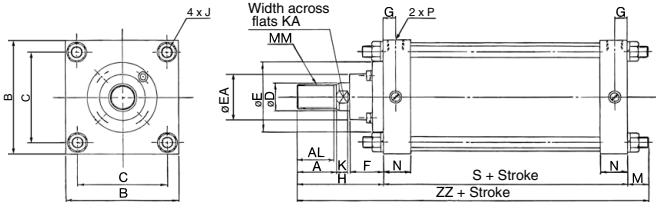


Bore size (mm)	Stroke range (mm)	A	AL	B	C	D	E	EA	F	G	J	K	KA	M	MM	N	P	S	H	ZZ
125	Up to 1000	50	47	145	115	36	90	59	43	16	M14 x 1.5	15	31	27	M30 x 1.5	35	1/2	98	110	235
140	Up to 1000	50	47	161	128	36	90	59	43	16	M14 x 1.5	15	31	27	M30 x 1.5	35	1/2	98	110	235
160	Up to 1200	56	53	182	144	40	90	59	43	18.5	M16 x 1.5	17	36	30.5	M36 x 1.5	39	3/4	106	120	256.5

(mm)


Proper Auto Switch Mounting Position (Detection at stroke end) and Mounting Height

Band mounting type


D-A3□
D-G3/K3

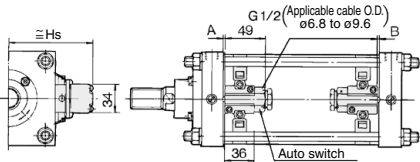

D-A44

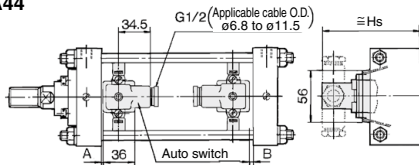


D-F5□/J59/D-F5NT
D-F5BA/F59F
D-F5□W/J59W

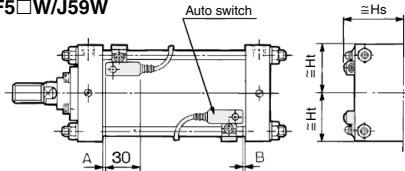


Tie-rod mounting type


D-M9□/M9□V D-Z7□/Z80
D-M9□W/M9□WV D-Y59□/Y69□/Y7P/Y7PV
D-M9□A/M9□AV D-Y7□W/Y7□WV
D-A9□/A9□V D-Y7BA

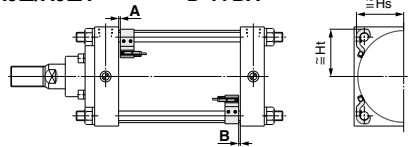

D-A5□/A6□

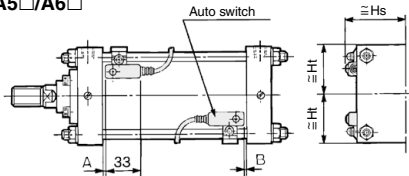

D-P3DWA

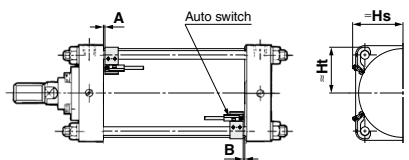

Proper Auto Switch Mounting Position

(mm)

Auto switch model	D-M9□ D-M9□V D-M9□W D-M9□WV D-M9□A D-M9□AV		D-A9□ D-A9□V		D-Z7□/Z80 D-Y5□/Y6□ D-Y7P/Y7PV D-Y7□W D-Y7□WV D-Y7BA		D-A5□ D-A6□ D-A3□ D-A44 D-G39 D-K39		D-A59W		D-F5□W D-J59W D-F5BA D-F5□ D-J59 D-F59F		D-F5NT		D-P3DWA	
	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B
Bore size 125	8	8	4	4	1.5	1.5	0	0	2	2	4.5	4.5	9.5	9.5	3.5	3.5
140	8	8	4	4	1.5	1.5	0	0	2	2	4.5	4.5	9.5	9.5	3.5	3.5
160	8	8	4	4	1.5	1.5	0	0	2	2	4.5	4.5	9.5	9.5	3.5	3.5
180	13.5	12.5	9.5	7.5	7	5	3.5	1.5	7.5	5.5	10	8	15	13	9	7
200	16	14	12	10	9.5	7.5	6	4	10	8	12.5	10.5	17.5	15.5	11.5	9.5

* The mounting position should be referred for reference only for the auto switch mounting position at the stroke end detection.

* Adjust the auto switch after confirming the operation to set actually.

* Low friction type (CDS1□Q): ø125, ø140, ø160

Auto Switch Mounting Height

(mm)

Auto switch model	D-M9□ D-M9□W D-M9□A D-A9□ D-A9□V		D-M9□WV D-M9□AV D-M9□V		D-Z7□/Z80 D-Y5□/Y6□ D-Y7P D-Y7PV D-Y7□W D-Y7□WV D-Y7BA		D-A3□ D-G39 D-K39		D-A44		D-A5□ D-A6□ D-A59W		D-F5□ D-J59 D-F5□W D-J59W D-F5BA D-F59F D-F5NT		D-P3DWA	
	Hs	Ht	Hs	Ht	Hs	Ht	Hs	Ht	Hs	Ht	Hs	Ht	Hs	Ht	Hs	Ht
Bore size 125	69	69.5	71.5	69.5	69	69.5	116	116	126	75.5	69.5	74.5	70	76	69.5	69.5
140	76	76	77.5	76	76	76	124	124	134	81	76.5	80	76.5	82	76	76
160	85	85	86	85	85	85	134.5	134.5	144.5	89	87.5	88	87.5	91	85	85
180	95	95	95.5	95	95	95	144	144	154	97	97.5	96	97.5	100	95	95
200	106	106	106	106	106	106	154	154	164	107	108	107.5	108	111	106	106

* Low friction type (CDS1□Q): ø125, ø140, ø160

Minimum Stroke for Auto Switch Mounting

							n: No. of auto switch (mm)
Auto switch model No.	No. of auto switch mounted	Bracket other than center trunnion	Center trunnion type				
			ø125	ø140	ø160	ø180	ø200
D-M9□ D-M9□W	2 (Different surfaces, Same surface)	1	15	105	110	115	
	n	$15 + 40 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8···) Note 1)	$105 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16···) Note 2)	$110 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16···) Note 2)		$115 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16···) Note 2)	
D-M9□V D-M9□VV	2 (Different surfaces, Same surface)	1	10	80	85	90	
	n	$10 + 30 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8···) Note 1)	$80 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16···) Note 2)	$85 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16···) Note 2)		$90 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16···) Note 2)	
D-M9□A	2 (Different surfaces, Same surface)	1	20	115		120	
	n	$20 + 40 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8···) Note 1)	$115 + 40 \frac{(n-2)}{2}$ (n = 4, 8, 12, 16···) Note 2)			$120 + 40 \frac{(n-2)}{2}$ (n = 4, 8, 12, 16···) Note 2)	
D-M9□AV	2 (Different surfaces, Same surface)	1	15	90		95	
	n	$15 + 30 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8···) Note 1)	$90 + 30 \frac{(n-2)}{2}$ (n = 4, 8, 12, 16···) Note 2)			$95 + 30 \frac{(n-2)}{2}$ (n = 4, 8, 12, 16···) Note 2)	
D-A9□	2 (Different surfaces, Same surface)	1	15	100	105	110	
	n	$15 + 40 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8···) Note 1)	$100 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16···) Note 2)	$105 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16···) Note 2)		$110 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16···) Note 2)	
D-A9□V	2 (Different surfaces, Same surface)	1	10	75	80	85	
	n	$10 + 30 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8···) Note 1)	$75 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16···) Note 2)	$80 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16···) Note 2)		$85 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16···) Note 2)	
D-A5□/A6□ D-A59W D-F5□/J59 D-F5□W D-J59W D-F55A D-F59F	2 (Different surfaces, Same surface)	1	25	125	135	150	
	n (Same surface)	$25 + 55 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8···) Note 1)	$125 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16···) Note 2)	$135 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16···) Note 2)		$150 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16···) Note 2)	
D-F5NT	2 (Different surfaces, Same surface)	1	35	145	155	170	
	n (Same surface)	$35 + 55 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8···) Note 1)	$145 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16···) Note 2)	$155 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16···) Note 2)		$170 + 55 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16···) Note 2)	
D-A3□ D-G39 D-K39	2	Different surfaces	35		110		150
		Same surface	100				
	n	Different surfaces	$35 + 30(n-2)$ (n = 2, 3, 4, 5···)		$110 + 30(n-2)$ (n = 2, 4, 6, 8···) Note 1)		$150 + 100(n-2)$ (n = 2, 4, 6, 8···) Note 1)
		Same surface	$100 + 100(n-2)$ (n = 2, 3, 4, 5···)		$110 + 100(n-2)$ (n = 2, 4, 6, 8···) Note 1)		$150 + 30(n-2)$ (n = 2, 4, 6, 8···) Note 1)
D-A44	2	Different surfaces	35		110		150
		Same surface	55				
	n	Different surfaces	$35 + 30(n-2)$ (n = 2, 3, 4, 5···)		$110 + 30(n-2)$ (n = 2, 4, 6, 8···) Note 1)		$150 + 30(n-2)$ (n = 2, 4, 6, 8···) Note 1)
		Same surface	$55 + 55(n-2)$ (n = 2, 3, 4, 5···)		$110 + 50(n-2)$ (n = 2, 4, 6, 8···) Note 1)		$150 + 50(n-2)$ (n = 2, 4, 6, 8···) Note 1)
D-Z7□ D-Z80 D-Y59□ D-Y7P D-Y7□W	2 (Different surfaces, Same surface)	1	15	105	110	115	
	n	$15 + 40 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8···) Note 1)	$105 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16···) Note 2)	$110 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16···) Note 2)		$115 + 40 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16···) Note 2)	
D-Y69□ D-Y7PV D-Y7□VV	2 (Different surfaces, Same surface)	1	10	90	95	100	
	n	$10 + 30 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8···) Note 1)	$90 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16···) Note 2)	$95 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16···) Note 2)		$100 + 30 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16···) Note 2)	
D-Y7BA	2 (Different surfaces, Same surface)	1	20	115	120	125	130
	n	$20 + 45 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8···) Note 1)	$115 + 45 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16···) Note 2)	$120 + 45 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16···) Note 2)	$125 + 45 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16···) Note 2)		$130 + 45 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16···) Note 2)
D-P3DWA	2 (Different surfaces, Same surface)	1	20	110	115	120	
	n	$20 + 50 \frac{(n-2)}{2}$ (n = 2, 4, 6, 8···) Note 1)	$110 + 50 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16···) Note 2)	$115 + 50 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16···) Note 2)		$120 + 50 \frac{(n-4)}{2}$ (n = 4, 8, 12, 16···) Note 2)	

* Low friction type (CDS1□□): ø125, ø140, ø160

Note 1) When "n" is an odd number, an even number that is one larger than this odd number is used for the calculation.
Note 2) When "n" is an odd number, a multiple of 4 that is larger than this odd number is used for the calculation.

Operating range

Auto switch model	Bore size (mm)				
	125	140	160	180	200
D-M9□/M9□V D-M9□W/M9□WV D-M9□A/M9□AV	6	6.5	6.5	6.5	7
D-A9□/A9□V	12	12.5	11.5	12	12.5
D-Z7□/Z80	14	14.5	13	14	14.5
D-A3□/A44 D-A5□/A6□	10	10	10	10	10
D-A59W	17	17	17	17	17
D-Y59□/Y69□ D-Y7P/Y7PV D-Y7□W/Y7□WV D-Y7BA	12	13	7	7.5	8
D-F5□/J59/F5□W D-J59W/F5BA D-F5NT/F59F	5	5	5.5	6	6
D-G39/K39	11	11	10	10	10
D-P3DWA	6	6.5	6.5	6.5	7

- * Since this is a guideline including hysteresis, not meant to be guaranteed.
(Assuming approximately ±30% dispersion.)
There may be the case it will vary substantially depending on an ambient environment.
- * Low friction type (CDS1□Q): ø125, ø140, ø160

Auto Switch Mounting Bracket: Part No.

Auto switch model	Bore size (mm)				
	ø125	ø140	ø160	ø180	ø200
D-M9□/M9□V D-M9□W/M9□WV D-M9□A/M9□AV D-A9□/A9□V	BS5-125	BS5-125	BS5-160	BS5-180	BS5-200
D-A5□/A6□ D-A59W D-F5□/J59 D-F5NT D-F5□W/J59W D-F5BA/F59F	BT-12	BT-12	BT-16	BT-18A	BT-20
D-A3□/A44 D-G39/K39	BS1-125	BS1-140	BS1-160	BS1-180	BS1-200
D-Z7□/Z80 D-Y59□/Y69□ D-Y7P/Y7PV D-Y7□W/Y7□WV D-Y7BA	BS4-125	BS4-125	BS4-160	BS4-180	BS4-200
D-P3DWA	BS7-125S	BS7-125S	BS7-160S	BS7-180S	BS7-200S

[Stainless Steel Mounting Screw Kit]


The following set of stainless steel mounting screws is available. Use them in accordance with the operating environment. (Since auto switch brackets are not included, order them separately.)

BBA1: For D-A5/A6/F5/J5 types

The above stainless steel screws are used when a cylinder is shipped with D-F5BA-type auto switches.

When only a switch is shipped independently, BBA1 screws are attached.

Note) When D-M9□A/M9□AV/Y7BA auto switches are used, do not use steel set screws included in the auto switch mounting brackets above (BS5-□□□ and BS4-□□□). Order the stainless steel screw set BBA1 separately, and use M4 x 8L stainless steel set screws included in BBA1 instead.



Note) Refer to page 1377 for the details of BBA1 screws.

* This figure shows how to mount D-A9□(V)/M9□(V)/M9□W(V)/M9□A(V).

Besides the models listed in How to Order, the following auto switches are applicable.
Refer to pages 1271 to 1365 for the detailed specifications.

Auto switch type	Part no.	Electrical entry (Fetching direction)	Features
Reed	D-A90V	Grommet (perpendicular)	Without indicator light
	D-A93V, A96V		
	D-Z73, Z76	Grommet (in-line)	—
	D-A53, A56		
	D-A67		Without indicator light
	D-Z80		
Solid state	D-F59, F5P, J59	Grommet (in-line)	—
	D-Y59A, Y59B, Y7P		
	D-F59W, F5PW, J59W		2-color display
	D-Y7NW, Y7PW, Y7BW		Water resistant (2 colors)
	D-F5BA, Y7BA		With timer
	D-F5NT		
	D-M9NV, M9PV, M9BV	Grommet (perpendicular)	—
	D-Y69A, Y69B, Y7PV		
	D-M9NWV, M9PWV, M9BWV		2-color display
	D-Y7NWV, Y7PWV, Y7BWV		
	D-M9NAV, M9PAV, M9BAV		Water resistant (2 colors)

* For solid state auto switches, auto switches with a pre-wired connector are also available. Refer to pages 1340 and 1341 for details.

* Normally closed (NC = b contact) solid state auto switches (D-M9□E(V)/Y7G/Y7H) are also available. Refer to pages 1290 and 1292 for details.



CS1 Series Specific Product Precautions

Be sure to read this before handling the products. Refer to page 20 for safety instructions and pages 21 to 30 for actuator and auto switch precautions.

Operating Precautions

Warning

1. **Do not use the cylinder as a shock absorber.**

Using the cylinder as a shock absorber may cause damage.


Caution

1. **Do not use a pneumatic type as an air-hydro cylinder. It can cause oil leak.**

2. **Do not rotate the piston rod when the rod boot is fixed.**

Before rotating the piston rod, loosen the band to avoid twisting the rod boot.

3. **Install the rod boot with the breathing hole facing downwards or in a direction suitable to prevent dust, moisture etc. from entering easily into the rod boot.**



4. **Do not open the cushion valve excessively.**

If the cushion valve is rotated excessively in the opening direction (counterclockwise), it could be damaged. Be aware that the valve could slip out, or the threads become too short.

5. **Regarding the installation of a knuckle joint**

Refer to page 637 if a knuckle joint must be installed on the piston rod by using the rod end nut.

6. **Do not place tape or other objects onto the painted surface of the unit.**

The paint of the CS cylinder is dried naturally, so it may peel off if tape or another object is placed onto it.

Disassembly/Replacement

Caution

1. **Do not replace the bushing.**

As the bushing is press-fitted, replace the retaining plate assembly when the bushing must be replaced.

2. **Do not replace the cushion seals.**

The cushion seals are press-fitted. To replace them, they must be replaced together as a cover assembly.

3. **When a seal is replaced, apply grease to the new seal before it is assembled.**

Operation of the cylinder without greasing will result in extreme abrasion of the seal, causing premature air leakage.

4. **The trunnion type cylinder requires accuracy in assembly.**

The trunnion type cylinder may lose dimensional accuracy and malfunction when it is disassembled and reassembled because the axial center of the trunnion and that of the cylinder will not be aligned easily.